PHILIPS

Fortimo

LED

Fortimo LED Strip 1ft 1100lm 8xx LV4

Datasheet

Fortimo LED Strip Gen4

Fortimo LED Strip systems are ideal for use in designer or miniaturized, slim linear luminaires for direct lighting in offices, banks, schools, public buildings, supermarkets and anywhere where a small, flexible form factor is appreciated.

Key features and benefits

- State-of-the-art LED module efficiency of up to 182 lm/W
- Long life-time: >50,000 hours
- High color rendering (CRI >80 and >90)
- Excellent color consistency of 3 SDCM
- Choice of color temperatures (3000 K, 4000 K and 5000 K)
- Two lumen packages: 650 lm and 1100 lm per foot
- Small LED module width of only 20mm
- Tunable lumen output, efficacy and lifetime
- Wide temperature (Tc) range from -40 °C to +80 °C
- Push-in connectors enabling automated wiring
- Five year system warranty

August 2018

Zhaga

Ordering data

Commercial product name	EOC	12NC	Box quantity
Fortimo LED Strip 1ft 1100lm 830 FC LV4	8718696 655115 00	9290 015 25406	168
Fortimo LED Strip 1ft 1100lm 840 FC LV4	8718696 655139 00	9290 015 25506	168
Fortimo LED Strip 1ft 1100lm 850 FC LV4	8718696 655153 00	9290 015 25606	168
Fortimo LED Strip 1ft 1100lm 865 FC LV4	8718696 655177 00	9290 015 25706	168
Fortimo LED Strip 1ft 1100lm 830 BC LV4	8718699 608668 00	9290 016 55206	168
Fortimo LED Strip 1ft 1100lm 840 BC LV4	8718699 608682 00	9290 016 55306	168

Drive currents

Parameter	Nominal*	Life**	Max***	Unit
Fortimo LED Strip 1ft 1100lm 8xx LV4	184	260	380	mA

Module temperatures

Parameter	Nominal*	Life**	Max***	Unit
T_c (case temperature at T_c point)	45	70	80	°C

* Nominal value at which typical performance is specified

** Value at which life time is specified

*** Maximum value for safe operation, do not operate above this value

Optical characteristics - table per color (CCT)

Fortimo LED Strip 1ft 1100lm 830 FC LV4
Fortimo LED Strip 1ft 1100lm 830 BC LV4

Parameter	Min	Typ	Max	Unit
Luminous flux	966	1044	1122	lm
Module efficacy	152	169	186	lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.432, 0.401)		-
Color consistency			3	SDCM
CRI	80			
Radiation angle		120		deg
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		
Δu'v' at 6000 hours			0.007	

R9=10
Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5

Operation point	830	lm	lm/W
80% I-nom 147mA	Tc 25 °C	869	177
	Tc-nom 45 °C	848	174
	Tc-life 80 °C	805	167
I-nom 184mA	Tc 25 °C	1071	172
	Tc-nom 45 °C	1044	169
	Tc-life 80 °C	989	162
I-life 260mA	Tc 25 °C	1468	162
	Tc-nom 45 °C	1429	159
	Tc-life 80 °C	1349	152

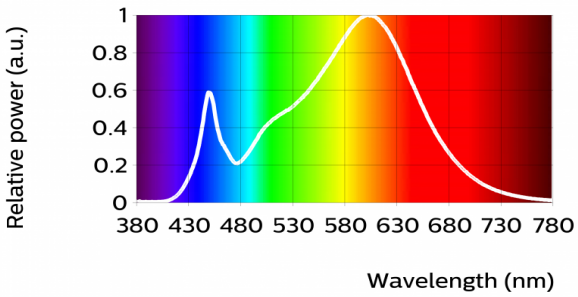

Fortimo LED Strip 1ft 1100lm 840 FC LV4
Fortimo LED Strip 1ft 1100lm 840 BC LV4

Parameter	Min	Typ	Max	Unit
Luminous flux	1018	1100	1182	lm
Module efficacy	160	178	196	lm/W
Correlated color temperature (CCT)		4000		K
Color coordinates (CIEx, CIEy)		(0.380, 0.377)		-
Color consistency			3	SDCM
CRI	80			
Radiation angle		120		deg
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		
Δu'v' at 6000 hours			0.007	

R9=5

Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5

Operation point	840	lm	lm/W
80% I-nom 147mA	Tc 25 °C	916	186
	Tc-nom 45 °C	894	183
	Tc-life 80 °C	849	176
I-nom 184mA	Tc 25 °C	1128	181
	Tc-nom 45 °C	1100	178
	Tc-life 80 °C	1043	171
I-life 260mA	Tc 25 °C	1548	171
	Tc-nom 45 °C	1506	167
	Tc-life 80 °C	1423	160

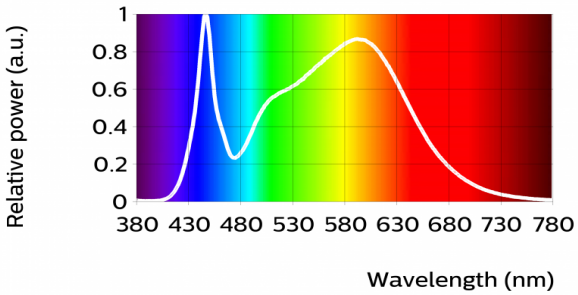

Fortimo LED Strip 1ft 1100lm 850 FC LV4

Parameter	Min	Typ	Max	Unit
Luminous flux	1027	1110	1193	lm
Module efficacy	162	180	198	lm/W
Correlated color temperature (CCT)		5000		K
Color coordinates (CIEx, CIEy)		(0.341, 0.350)		-
Color consistency			3	SDCM
CRI	80			
Radiation angle		120		deg
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		
Δu'v' at 6000 hours			0.007	

R9=5

Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5

Operation point	850	lm	lm/W
80% I-nom 147mA	Tc 25 °C	924	188
	Tc-nom 45 °C	902	185
	Tc-life 80 °C	857	178
I-nom 184mA	Tc 25 °C	1139	182
	Tc-nom 45 °C	1110	180
	Tc-life 80 °C	1052	172
I-life 260mA	Tc 25 °C	1562	172
	Tc-nom 45 °C	1520	169
	Tc-life 80 °C	1437	162

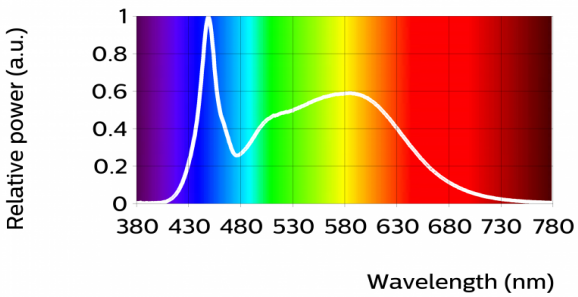

Fortimo LED Strip 1ft 1100lm 865 FC LV4

Parameter	Min	Typ	Max	Unit
Luminous flux	1018	1100	1182	lm
Module efficacy	160	178	196	lm/W
Correlated color temperature (CCT)		6500		K
Color coordinates (CIEx, CIEy)		(0.309, 0.324)		-
Color consistency			3	SDCM
CRI	80			
Radiation angle		120		deg
Photobiological safety			RG1 unlimited	
Energy efficiency label		A++		
Δu'v' at 6000 hours			0.007	

R9=14

Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5

Operation point	865	lm	lm/W
80% I-nom 147mA	Tc 25 °C	916	186
	Tc-nom 45 °C	894	183
	Tc-life 80 °C	849	176
I-nom 184mA	Tc 25 °C	1128	181
	Tc-nom 45 °C	1100	178
	Tc-life 80 °C	1043	171
I-life 260mA	Tc 25 °C	1548	171
	Tc-nom 45 °C	1506	167
	Tc-life 80 °C	1423	160

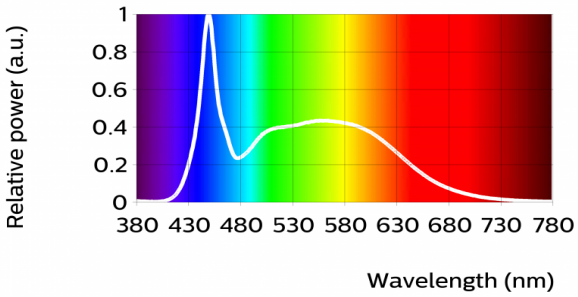

Beam shape

The Philips LED module generates a Lambertian beam shape, which is a pragmatic starting point for OEMs wishing to design secondary optics.

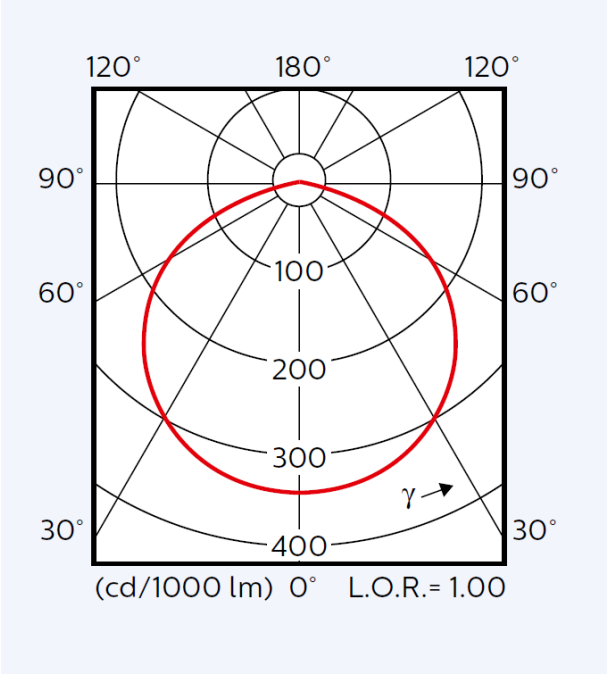

Electrical characteristics

Fortimo LED Strip 1ft 1100lm 830 FC LV4
Fortimo LED Strip 1ft 1100lm 840 FC LV4
Fortimo LED Strip 1ft 1100lm 850 FC LV4
Fortimo LED Strip 1ft 1100lm 865 FC LV4
Fortimo LED Strip 1ft 1100lm 830 BC LV4
Fortimo LED Strip 1ft 1100lm 840 BC LV4

Parameter	Min	Typ	Max	Unit
Forward voltage	32.1	33.6	35.1	V
Power consumption	5.9	6.2	6.5	W
Number of modules in series per chain			1	
Number of modules in parallel per chain			10	

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%
Specifications stated at Tc-nom and I-nom

Tuning information

Flux and efficacy versus current (at Tc nominal)

I [mA]	Flux [%]	Efficacy [%]
260	137	94
222	119	97
184	100	100
147	81	103
92	52	108

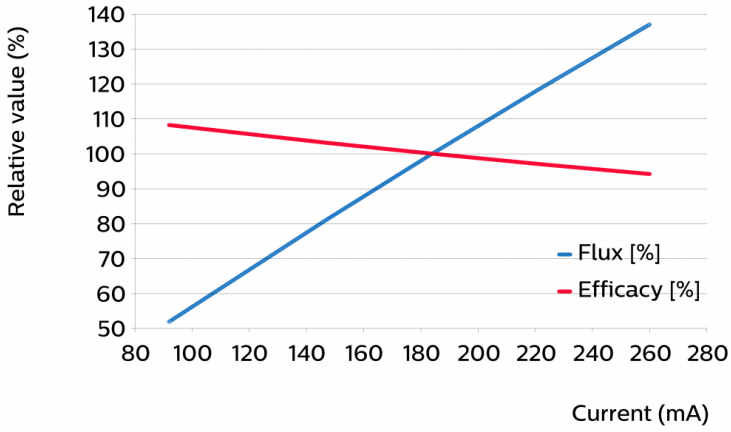

Flux and efficacy versus temperature at Tc (at I nominal)

Tcase [°C]	Flux [%]	Efficacy [%]
70	96	97
45	100	100
25	103	102
0	105	104

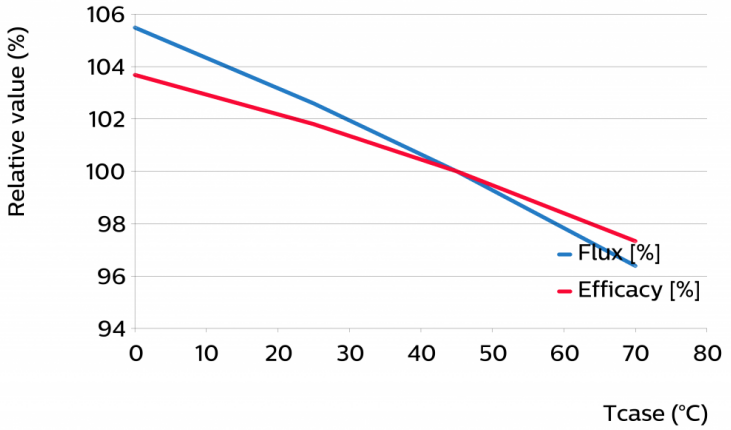

Lumen maintenance

Operation point	Lumen maintenance	L70			L80			L90		
	x 1000 hours	B50	B20	B10	B50	B20	B10	B50	B20	B10
80% I nom 147 mA	Tc 25°C	>70	>70	>70	>70	65	60	35	35	30
	Tc nom 45°C	>70	>70	>70	>70	65	60	35	35	30
	Tc life 70°C	>70	>70	>70	55	50	50	30	25	25
I nom 184 mA	Tc 25°C	>70	>70	>70	>70	65	60	35	35	30
	Tc nom 45°C	>70	>70	>70	>70	65	60	35	35	30
	Tc life 70°C	>70	>70	>70	55	50	50	30	25	25
I life 260 mA	Tc 25°C	>70	>70	>70	>70	65	60	35	35	30
	Tc nom 45°C	>70	>70	>70	>70	65	60	35	35	30
	Tc life 70°C	>70	>70	>70	55	50	50	30	25	25

Lifetime

Lifetime L70B50 > 70 0000 hours at I-life and Tc-life. >70 000 hours claim is based on extrapolating raw LM80-data to lower temperatures and currents by using statistical techniques.

Wiring

Specification item	Value	Unit	Condition
Input wire cross-section	0.25…0.75	mm^2	solid wire
	18…24	AWG	solid wire
Input wire strip length	7.5…8.5	mm	
Input wire cross-section	0.33…0.5	mm^2	stranded wire
	20…22	AWG	stranded wire
Input wire strip length	7.5…8.5	mm	

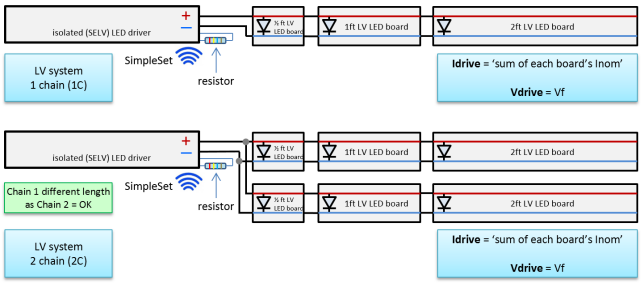

More information in the design-in guide of LED Linear modules.

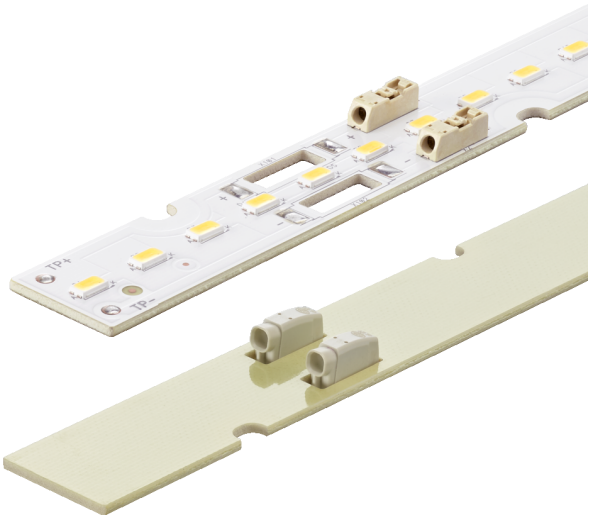

Mechanical characteristics

Fortimo LED Strip 1ft 1100lm 830 FC LV4
Fortimo LED Strip 1ft 1100lm 840 FC LV4
Fortimo LED Strip 1ft 1100lm 850 FC LV4

Parameter	Min	Typ	Max	Unit
Length	278.9	279.2	279.5	mm
Width	19.8	20	20.6	mm
Height excl. connector	1.45	1.6	1.75	mm
Height incl. connector	3.85	4.2	4.55	mm

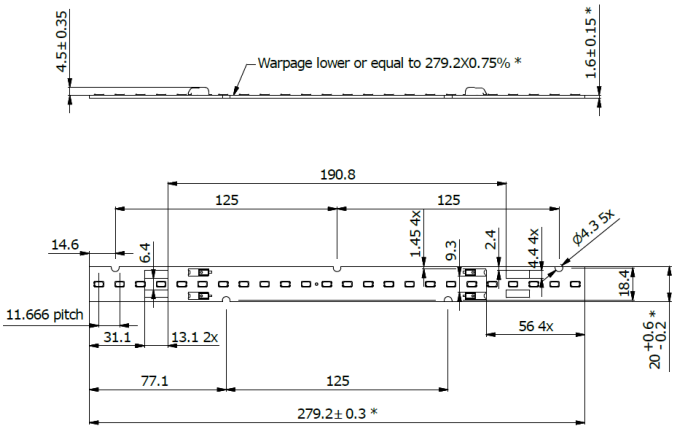

Fortimo LED Strip 1ft 1100lm 830 BC LV4
Fortimo LED Strip 1ft 1100lm 840 BC LV4

Parameter	Min	Typ	Max	Unit
Length	278.9	279.2	279.5	mm
Width	19.8	20	20.6	mm
Height excl. connector	1.45	1.6	1.75	mm
Height incl. connector	4.35	4.7	5.05	mm

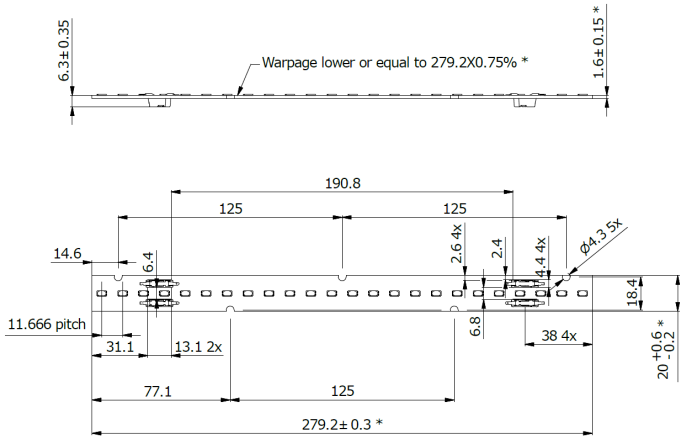

Absolute ratings

Parameter	Min	Typ	Max	Unit
Current through the LED module (I-max)			278	mA
Case temperature (Tc-max)			80	°C
Power at rated Vf-max and I-max			14.8	W
ESD (direct contact)			8	kV
ESD (air)			15	kV
Working voltage			120	V_{dc}
Voltage strength	1240			V_{ac}
Ambient temperature	-40			°C

Application information

Certificates and Standards
IEC 62031:2008 (First Edition) + A1:2012 + A2:2014
EN 62031:2008 (First Edition) + A1:2013 + A2:2015
Relevant clauses of IEC 62471:2006 (Incl. IEC/TR 62471-2: 2009 and IEC/TR 62778: 2014)
Relevant clauses of EN 62471:2008 (With IEC/TR 62471-2: 2009 and IEC/TR 62778: 2014)
ENEC (Products are tested for safety and operation AND IEC approved by an accredited testhouse)
ENEC+
CE
UL 8750

Environmental
RoHS/REACH

Zhaga	Compliant*

*Book 7

Application	
IP rating	No IP-rating
Overheating protection	No protection
Luminaire class	Class I and Class II
Dimming	Yes

Performance Window

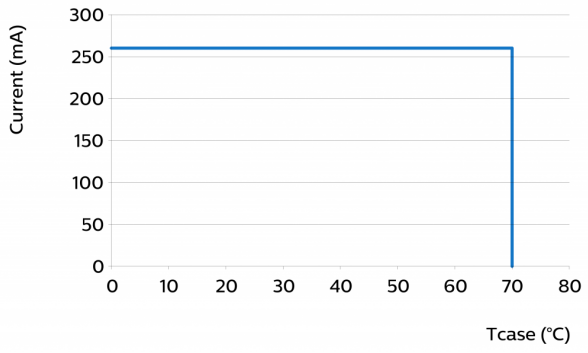

© 2018 Philips Lighting Holding B.V. All rights reserved.
This document contains information relating to the Philips Lighting portfolio, intended for companies who may be interested in developing their product offering. Note that the information provided is subject to change. Philips Lighting does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

08/2018

www.philips.com/technology