

PHILIPS

CertaFlux

LED system

CertaFlux DLM Slim



Design-in Guide

Philips CertaFlux DLM Slim

December, 2018

Published versions

October 2016 First version

Updated since previous version

Merge of Linear DIG with Spot & Downlight DIG

Contents

1. Introduction to this guide	4	7. Electrical design-in and flexibility	12
Information and support	4	Connecting the module	12
Determine which documents contain what information	4	Class I and Class II	12
2. Warnings and instructions	5	8. Compliance and approval	13
Safety warnings and installation instructions	5	Safety	13
Design-in phase	5	Environmental	13
Manufacturing phase	5	Approval	13
Installation and service for luminaires incorporating the CertaFlux DLM Slim module ...	5	IEC recommendations	13
Philips Design-in support	5	Photobiological safety aspects	14
3. Introduction to CertaFlux DLM Slim module	6	Radiance-based	14
Application Information	6	Irradiance-based	14
Choosing the Correct CertaFlux DLM Slim module	6	Humidity	15
Naming of the CertaFlux DLM Slim module	6	Exposure to direct sunlight	15
Emergency Application	6	Vibration and shocks	15
4. Optical design-in	7	IP codes, dust and moisture protection	15
CertaFlux DLM Slim module address the issue of binning	7	Philips CertaFlux DLM Slim module is to be used for indoor applications	15
Color consistency (SDCM)	7	Glow-wire test	15
Starting characteristics	7	End-of-life behavior	15
Lumen maintenance	7	CertaFlux DLM Slim module disposal	16
Light distribution and secondary optics	8	Chemical Compatibility	16
5. Mechanical design-in	9	Environmental	18
About the CertaFlux DLM Slim module	9	Cautions	18
Mechanical fixation	9	9. Contact details	19
CertaFlux DLM Slim module dimensions	9	Philips CertaFlux DLM Slim systems	19
6. Thermal design-in	10	Philips ESD support	19
Optimum performance	10	10. Disclaimer	20
Test requirements	10		
Critical measurement points	11		
Tc-lifetime	11		

1. Introduction to this guide



CertaFlux DLM Slim

Thank you for choosing CertaFlux DLM Slim module. In this guide you will find the information you require to design a luminaire based on these modules. As LED technology is continuously improving, we advise you to visit our website:

www.lighting.philips.com.sg/oem-sg for latest details.


Information and support

If you require any further information or support please consult your local Philips office. The Philips Design-in Team is also available to support you and you can contact with them via your local Philips representative.

Determine which documents contain what information

In order to provide information in the best possible way, Philips' philosophy on product documentation is the following.

- Commercial leaflet contains product family information & system combinations (compatible Philips drivers and Rsets)
- Datasheet contains the module specification
- Design-In Guide describes how to design-in the products

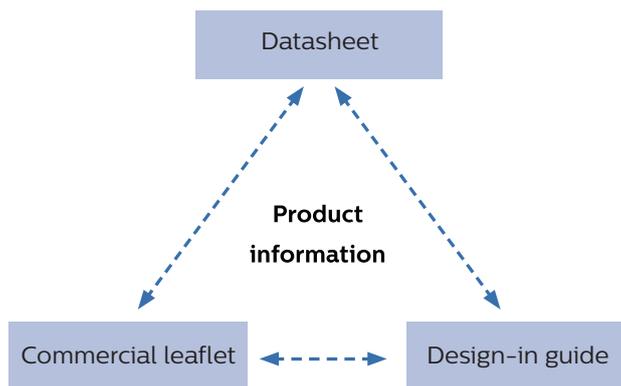

All these documents can be found on the download page of the OEM website www.lighting.philips.com.sg/oem-sg If you require any further information or support please consult your local Philips office.

2. Warnings and instructions

Safety warnings and installation instructions

To be taken into account during design-in and manufacturing.

Design-in phase

- Provide adequate environmental protection
- Avoid contamination (direct or indirect) from any incompatible chemicals reacting with the silicone. A list of incompatible chemicals is provided in the chapter for Compliance and Approval.
- Please use screw to fix the module and do not open module

Manufacturing phase

- Do not use products in case the LEDs are dislodged or if the housing is broken
- Do not drop the CertaFlux DLM Slim or damage in any way.
- Avoid contamination (direct or indirect) from any incompatible chemicals reacting with the silicone. A list of incompatible chemicals is provided in the chapter for Compliance and Approval.

Installation and service for luminaires incorporating the CertaFlux DLM Slim module

- Do not service the luminaire when the mains voltage is connected

Philips Design-in support

Is available; please contact your Philips sales representative.

3. Introduction to CertaFlux DLM Slim module



CertaFlux DLM Slim module

Application Information

CertaFlux DLM Slim is to provide a good LED solution in general lighting. This range product offers longer life time & efficient lighting solution for residential and commercial application.

It is consistent with other CertaFlux Downlight families of modules, delivering simple selection of lighting solution in one system. It also provides easy designs via easy wiring/assembly.

In this guide you will find the specific information required to develop a luminaire based on CertaFlux DLM Slim module.

Product specific data can be found in the associated datasheet on www.lighting.philips.com.sg/oem-sg.

Choosing the Correct CertaFlux DLM Slim module

CertaFlux DLM Slim is available with 3 lumen (600/1000/2000lm) and 4 CCTs (830/840/850/865) for options. Please refer to the datasheet for details about each SKU. For system combinations, please check Commercial leaflet.

Naming of the CertaFlux DLM Slim module

The names of the modules are defined as shown in the example below:

CertaFlux DLM Slim 1000lm 830 4"

CertaFlux	Our brand name for quality, value of money and reliable LED lighting
DLM	Downlight module
Slim	Slim module design
1000	lumen package
830	CCT and CRI
4"	Indicate for 4 inch downlight application

Emergency Application

CertaFlux DLM Slim is not recommended work with Emergency systems.

4. Optical design-in

CertaFlux DLM Slim module address the issue of binning

High-quality LED light is achieved by mixing the light of various LEDs. High quality white light is characterized by a good color consistency and a color rendering of >80, popular CCTs in downlight applications of 3000/4000/5000/6500K. The Optimized diffuser gives uniform light.

Color consistency (SDCM)

The current specification of the CertaFlux DLM Slim module for color consistency is 6 SDCM at 0 hours. SDCM stands for Standard Deviation of Color Matching and the value 6 refers to the size of an ellipse around the black body locus.

Starting characteristics

The CertaFlux DLM Slim modules can be switched on in milliseconds, which is a general characteristic of LEDs.

Lumen maintenance

L70B50 @ 25,000 hours

The quality of the CertaFlux DLM Slim portfolio is backed by the Philips' claim of B50L70 @ 25,000 hours. This means that at 25,000 hours of operation at least 50% of the LEDs' population will emit at least 70% of its original amount of lumens.



This is contrary to conventional light sources, where some time after Service Life Hours the conventional light source emits no light at all. In this section the example graphs show the estimated lumen depreciation curves for different percentage of the population and at nominal Tc temperatures.

The actual data for the DLM Slim modules can be found in the associated datasheet at www.lighting.philips.com.sg/oem-sg

Average rated life is based on engineering data testing and probability analysis. The CertaFlux DLM Slim modules are specified to reach L70B50 for the nominal specifications.

Lumen maintenance for B10 and B50

The example graph is showing the lumen maintenance (% of initial lumen over time) for B50 (50% of the population) and B10 (90% of the population). Please look up the actual lumen maintenance graph in the associated datasheet of the CertaFlux DLM Slim module you are using at www.Philips.com/Technology.

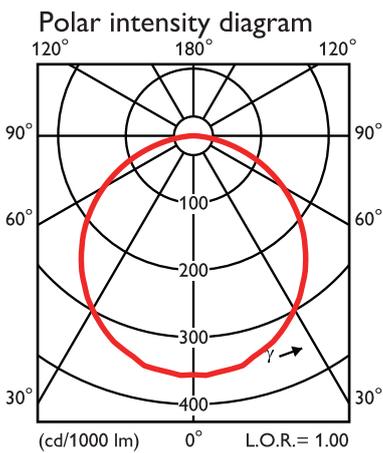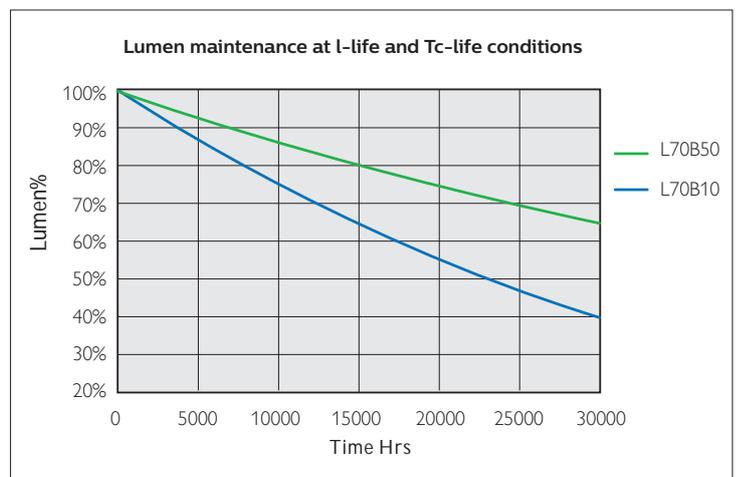

Light distribution diagram

Light distribution and secondary optics

The CertaFlux DLM Slim module generates a lambertian beam shape; the polar intensity diagrams for each module are given in the datasheets. The lambertian light distribution enables a simple downlight luminaire design with good uniformity.

5. Mechanical design-in

About the CertaFlux DLM Slim module

Do not open CertaFlux DLM Slim module during the mechanical design-in as CertaFlux DLM Slim module is a highly integrated module.

Mechanical fixation

Please note the right connection between module and driver. The red wire from module indicate the positive while black wire indicate the negative.

Strain relife is also necessary to protect the the wiring btween module and driver.

Installation Guide

Additional installation guide can be downloaded from our website www.lighting.philips.com.sg/oem-sg.

CertaFlux DLM Slim module dimensions

3D CAD files can be downloaded from our website www.lighting.philips.com.sg/oem-sg.

Basic dimensions for each module can also be found in the datasheets which are also available at the before mentioned website.

6. Thermal design-in

The critical thermal management points for the LED module are set out in this chapter in order to facilitate the design-in of CertaFlux DLM Slim module. If these thermal points are taken into account, this will help to ensure optimum performance and lifetime of the LED system.

Optimum performance


To ensure optimum performance, the CertaFlux DLM Slim module must operate within specified temperature limits.

Test requirements

Measurements, e.g. of temperature, luminous flux and power, are reliable once the luminaire is thermally stable, which may take between 0.5 and 2 hours, and is defined as at least 3 readings of light output and electrical power over a period of 30 minutes taken 15 minutes apart with stability less than 0.5%. The time depends on the thermal capacity of the luminaire (see also the relevant clauses in IEC 60598-1).

Note:

Thermal stability can be considered if the temperature changes are less than 1°C over three measurements taken 15 minutes apart. Measurements must be performed using thermocouples that are firmly glued to the surface (and not, for example, secured with adhesive tape).

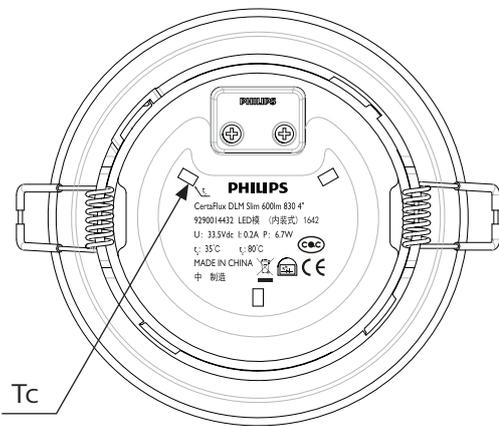

Tc position marked in the module

Case temperature at Tc point

Critical measurement points


Because LEDs are temperature sensitive, LED modules require a different approach with respect to the maximum permissible component temperature. This is different to most other types of conventional light sources.

For LEDs the junction temperature is the critical factor for operation. Since there is a direct relation between the case temperature and the LED junction temperature, it is sufficient to measure the casing of the LED module at its critical point. The critical point is on the rear surface of the LED module, as shown in the figure on the left. If the case temperature (T_c) at the critical measurement point exceeds the recommended T_c temperature, the performance of the LEDs will be adversely affected, for example in terms of light output, lifetime or lumen maintenance.

Tc-lifetime

At T_c -lifetime all the specifications mentioned in CertaFlux DLM Slim module commercial leaflet, datasheets and design-in guide are valid and a 2 year warranty is applicable.

7. Electrical design-in and flexibility

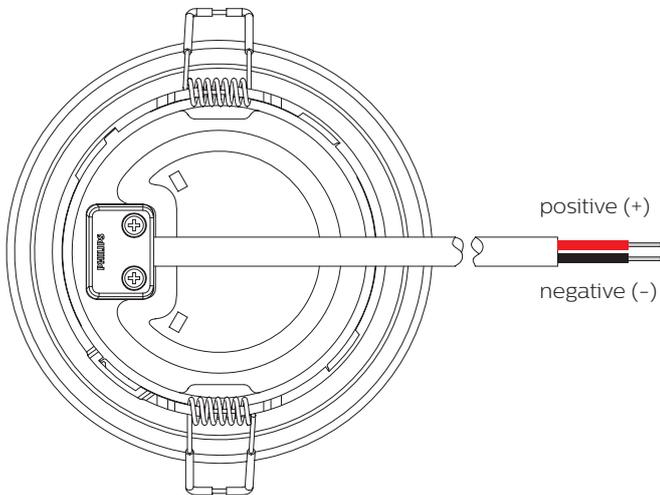

Wiring for Positive(+) and Negative(-)

Connecting the module

Please note the right connection between module and driver. The red wire from module indicate the positive while black wire indicate the negative.

Strain relife is also necessary to protect the the wiring between module and driver.

Class I and Class II

CertaFlux DLM Slim module can only support Class II luminaire design.

CertaFlux DLM Slim module must connect with 'SELV' driver.

8. Compliance and approval

CertaFlux DLM Slim module comply with following norms and standards:

Safety

IEC/EN 62031	LED modules for general lighting - safety specifications
IEC 62471/62778	Photo biological safety of lamps and lamp systems

Environmental

The product is compliant with European Directive 2002/95/EC of January 2003 on Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS).

Approval

- CB/CE/CQC
- Working voltage at which the insulation is designed for 240V

IEC recommendations

The general recommendations for luminaire design given by the IEC (IEC 60598) and the national safety regulations are also applicable to LED-based luminaires.

Photobiological safety aspects

As of March 2007, LEDs and LED-based products for general lighting are no longer included in the scope of the Eye Safety standard for lasers, IEC 60825-1 'Safety of laser products'. The new lamp standard, IEC 62471 'Photo biological safety of lamps and lamp systems', which covers incoherent light sources, now applies. This international standard gives guidance on evaluating the photo biological safety of lamps and lamp systems including luminaires. It specifically defines the exposure limits, reference measurement technique and classification scheme for the evaluation and control of photo biological hazards from all electrically powered incoherent broadband sources of optical radiation, including LEDs but excluding lasers, in the wavelength range from 200 nm to 3000 nm.

In the photo biological safety standard, hazard categories are defined as follows:

Radiance-based

- | | | |
|-------------------|----|---------------|
| • Blue Light | LB | 300 - 700 nm |
| • Retinal Thermal | LR | 380 - 1400 nm |

Irradiance-based

- | | | |
|-------------------------|------|---------------|
| • Actinic UV Skin & Eye | ES | 200 - 400 nm |
| • Eye UVA | EUVA | 315 - 400 nm |
| • Thermal skin* | EH | 380 - 3000 nm |
| • Eye IR | EIR | 780 - 3000 nm |

* Thermal skin is not defined in IEC 62471 and hence cannot be classified in risk groups.

CertaFlux DLM Slim module gave the following results The following should be taken into account:

- The effective radiance measurement for Blue Light (LB) modules is 'RG1'. Final assessment of the luminaire is recommended.

Humidity

CertaFlux DLM Slim module can withstand a high humidity (90% rh) environment.

Exposure to direct sunlight

Exposure to direct sunlight during operation may have severe temperature or UV effects.

Vibration and shocks

Shock resistance: 30 g @18 ms semi-sinusoidal.
Vibration resistance: sweep 10–50 Hz, one hour at resonance frequency (all 3 axes) without failure.

IP codes, dust and moisture protection

CertaFlux DLM Slim module has IP 20 classification. The OEM is responsible for proper IP classification and approbation of the luminaire.

Philips CertaFlux DLM Slim module is to be used for indoor applications

When used in a non-weather protected environment, additional measures shall be taken to protect the CertaFlux DLM Slim module from water ingress.

Glow-wire test

Philips CertaFlux DLM Slim module conforms to the 650-degree glow-wire test. Reference test: According to additional national deviations for clause 13.3 (Annex 2c of EN 60598-1). An exception is made for France, where local regulations are more strict.

End-of-life behavior

Unlike typical conventional light sources, LEDs are not subject to sudden failure or burnout. There is no time at which the light source will cease to function. Instead, the performance of LEDs shows gradual degradation over time. When used according to specification, CertaFlux DLM Slim module is predicted to deliver an average of 70% of their initial intensity after 25,000 hours of operation. The life of the system is therefore more dependent on the other electronic system components and soldering methods.

CertaFlux DLM Slim module disposal

We recommend that the CertaFlux DLM Slim module or its components are disposed of in an appropriate manner at the end of their (economic) lifetime. The modules are essentially normal pieces of electronic equipment containing components that at present are not considered to be harmful to the environment and can be disposed of with normal care. We therefore recommend that these parts are disposed of as normal electronic waste, in accordance with local regulations.

Chemical Compatibility

The CertaFlux DLM Slim module makes use of LEDs containing a silver-finished (Ag) Lead frame. The lead frame finish is sensitive to pollution and or corrosion when exposed to Oxygen and certain Volatile Organic Components [VOCs]. Examples of VOCs are substances containing Sulfur or Chlorine. In that case parts of the lead frame may blacken, which will impair the lumen output or the color point of the LED light. Materials that are known to have a higher risk to be a source of Sulfur and Chlorine are for example rubbers used for cables & cable entries, sealing's or corrugated carton. Also do NOT use adhesives, cleaning agents, coatings containing suspect VOCs. Nor use the product in aggressive (corrosive) environments that may cause damage to the LED's.

We recommend ensuring that the direct environment of these LEDs in the luminaire does not contain materials that can be a source of Sulfur or Chlorine, for optimal reliability of the LED, LED module and/or LED luminaire. Furthermore, make sure that the products with these LEDs are not stored or used in vicinity of sources of Sulfur or Chlorine, and the production environment is also free of these materials. Also avoid cleaning of the LED products with these types of LEDs with abrasive substances, brushes or organic solvents like Acetone and TCE.

Applications of the product in industry and heavy traffic environment should be avoided in case of risk of ingress of Sulfur and Chlorine from the environment.

A list of chemicals, often found in electronics and construction materials for luminaires that should be avoided, is provided in the table below. Note that Philips does not warrant that this list is exhaustive since it is impossible to determine all chemicals that may affect LED performance. These chemicals may not be directly used in the final products but some of them may be used in intermediate manufacturing steps (e.g. cleaning agents). Consequently, trace amounts of these chemicals may remain on (sub) components, such as heat sinks. It is recommended to take precautions when designing your application.

In case of questions on compatibility of materials or applications of the product please contact your Philips representative for application support.

Chemical Name	Normally used as
Acetic acid	Acid
Hydrochloric acid	Acid
Nitric acid	Acid
Sulfuric acid	Acid
Ammonia	Alkali
Potassium hydroxide	Alkali
Sodium hydroxide	Alkali
Acetone	Solvent
Benzene	Solvent
Dichloromethane	Solvent
Gasoline	Solvent
MEK (Methyl Ethly Ketone)	Solvent
MIBK (Methyl Isobutyl Isobutyl Ketone)	Solvent
Mineral spirits (turpentine)	Solvent
Tetracholorometane	Solvent
Toluene	Solvent
Xylene	Solvent
Castor oil	Oil
Lard	Oil
Linseed oil	Oil
Petroleum	Oil
Silicone oil	Oil
Halogenated hydrocarbons (containing F, Cl, Br elements)	MISC
Rosin flux	Solder flux
Acrylic tape	Adhesive
Cyanoacrylate	Adhesive

Environmental

The product is compliant with European Directive 2011/65/EC on Restriction of the Use of Certain Hazardous Substances in electrical and electronic equipment (RoHS2).

Cautions

During storage and transportation

- Store in a dark place. Do not expose to sunlight.
- Maintain temperature between -40 ~ +65 °C, and RH 5 – 95%.

During operation

Philips shall not be held responsible or liable for any damage, costs or expenses to the user, resulting from an accident or any other cause during operation if the system is used without due observance of the absolute maximum ratings and other instructions provided by Philips.

There must be no ice/water/fog exist or attach on the whole module during the application.

Note:

That warranty is applicable for the Philips Certaflux DLM Slim module for 3 switching cycles per day.

9. Contact details

Philips CertaFlux DLM Slim

www.lighting.philips.com.sg/oem-sg

Or contact your local Philips sales representative.

Philips ESD support

www.innovationservices.philips.com

Phone : +31- (0) 40 27 46658

Fax : +31 - (0) 40 27 42224

The Philips corporate EMC competence centre is a leading provider of approbation and consultancy services.

If you need support when using Philips CertaFlux DLM Slim module together with Philips Certa Driver, please contact your local Philips sales representative.

10. Disclaimer

Philips will perform the testing of the LED systems to high standards of workmanship. The tests are carried out with reference to the EN/IEC standards, if any, which are regarded by Philips as being of major importance for the application of the lamp gear and the lamp within the fixture for horticultural applications.

The design-in guide, regarding the testing and design in of the LED system provided by Philips, is not an official testing certificate, and cannot be regarded as a document for official release of the fixture. The OEM is liable for the official testing by a certified test body and all markings, such as CE and ENEC marks, on the fixture assembly.

The design-in guide is for information purposes only and may contain recommendations for detecting weak points in the design of the system (lamp – lamp gear – fixture), if any.

Specifically mentioned materials and/or tools from third parties are only indicative: other equivalent equipment may be used but it is recommended that you contact Philips for verification. Philips will not be liable for unforeseen interactions of the proposed solutions when applied in the fixtures or applications using these fixtures. Philips has not investigated whether the recommendations are or will in the future be in conflict with existing patents or any other intellectual property right. Philips does not warrant that its recommendations are technically or commercially the best options.

Since the tests are only performed on one particular fixture provided by the customer, it will be treated as a prototype. This means that there is no statistical evidence regarding later production quality and performance of the lamp – lamp gear – fixture system. As Philips does not have control over manufacturing of the fixtures, Philips cannot be held liable for the fixture assembly. Philips will not accept claims for any damage caused by implementing the recommendations.

No warranty whatsoever may be claimed by the OEM with regard to the content and/or quality of the design-in guide or any other advice, or the conclusions and/or recommendations in the design-in guide or any other document, either express or implied, and Philips expressly disclaims any implied warranties of any kind, including without limitation any warranties of satisfactory quality, fitness for a particular purpose or non-infringement and any warranties regarding the design-in guide or any other advice or the use of the results of any activity performed while testing the fixture with respect to its correctness, quality, accuracy, completeness, reliability, performance or otherwise. The OEM expressly agrees that test design-in guides are provided by Philips on an 'as is' basis and an 'as available' basis at customer's sole risk and expense. Philips shall not be liable for any lost profits or lost savings, indirect, incidental, punitive, special, or consequential damages whether or not such damages are based on tort, warranty, contract, or any other legal theory – even if Philips has been advised, or is aware, of the possibility of such damages.s

The OEM must bring any claim for damages within ninety (90) days of the day of the event giving rise to any such claim, and all lawsuits relative to any such claim.



© 2018 Signify Holding, IBRS 10461, 5600VB, NL. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

December 2018
Data subject to change

www.philips.com/technology
www.lighting.philips.com.sg/oem-sg