

HID-PV m 20-35 / I CDM



HID-PV m 20-35 / I CDM

9137-006-46266 sht-460 2011-04-06

Philips Lighting Electronics
GDC Eindhoven
Author: Johan Kokx
April 2011
9137-006-46266 sht-460 2011-04-06

HID-PV m 20-35 / I CDM

Contents

1. Introduction	3
2. Version management	3
3. Ordering	3
4. Dimensions and mechanical design-in	4
5. Temperature behaviour	4
6. Wiring	5
7. Electro-Magnetic Compatibility	6
8. Factory handling	7
9. Installation / Mounting	7
10. Operating in abnormal conditions	9
11. Advised communication	9
12. Frequently Asked Questions	10
13. For more information	10

HID-PV m 20-35 /I CDM

1. Introduction

The PrimaVision Mini driver is the smallest HID gear in the market. This breakthrough in technology has been possible by joint development of the driver, lamp and input from OEMs.

The PrimaVision Mini 20W HPF will enable you to have a better power factor as with the 20W LPF. This is especially important in applications with a higher number of luminaires

The drivers have improved EMI and are thus CISPR-compliant.

2. Version management

This is the design-in sheet for the PrimaVision Mini 20-35 /I drivers.

Status of the products: Released

Previous status: Released

06-04-2011: 9137-006-46266 sht-460 2011-04-06

Update chapter 9; make table with number of drivers per MCB uniform.

13-10-2010: 9137-006-46266 sht-460 2010-10-13

CISPR15 ed.7.2 compliance

30-05-2007: Version 1.0

Final version

Version 0.1

Draft version

3. Ordering

Technical name: HID-PV m 20 /I CDM

HID-PV m PGJ5 20 /I CDM
LPF

12NC: 9137 006 46266

9137 006 01666

EAN3: 8727900890600

8711500909824

EOC: 872790089060000

871150090981730

Technical name: HID-PV m 35 /I CDM

12NC: 9137 006 53566

EAN3: 8727900891645


EOC: 872790089164500

Product	Qty box/pallet	Net weight (kg)	Box Dim. LxWxH (mm)	Pallet Dim. LxWxH (mm)
HID-PV m 20 /I CDM	10/480	0.312	255x245x82	1200x800x550
HID-PV m PGJ5 20 /I CDM LPF	12/1080	0.140	244x193x146	1200x800x880
HID-PV m 35 /I CDM	10/480	0.312	255x245x82	1200x800x550

HID-PV m 20-35 / I CDM


4. Dimensions and mechanical design-in

HID-PV m PGJ5 20 / I CDM LPF

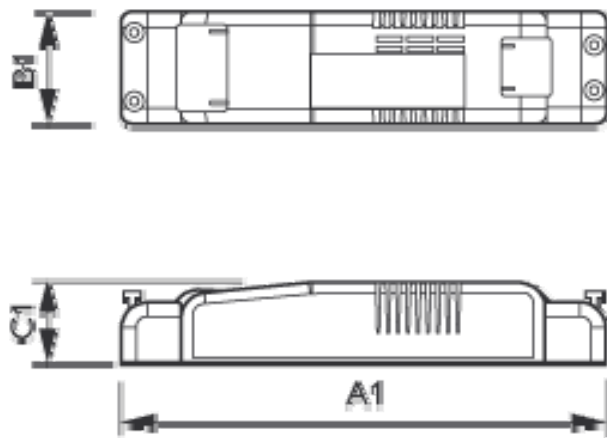

A1 (mm)	B1 (mm)	C1 (mm)
190.0	43.3	30.0

HID-PV m 20 / I CDM & HID-PV m 35 / I CDM:

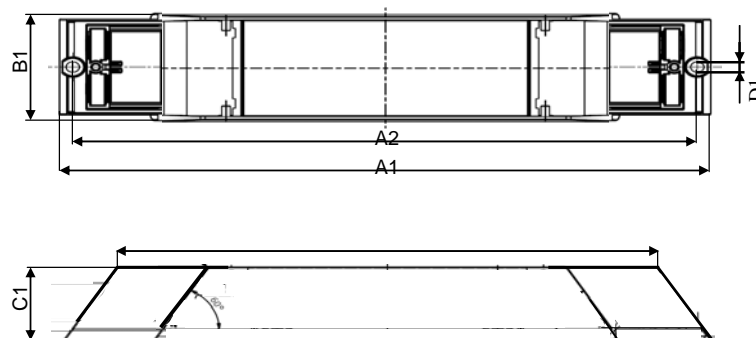


A1 (mm)	A2 (mm)	B1 (mm)	C1 (mm)	D1 (mm)
234.7	225.1	49.4	34.0	4.8

5. Temperature behaviour

T_{case} HID-PV m 20 / I CDM and HID-PV m 35 / I CDM

The T_{case}-point is the position shown on the drawing below.

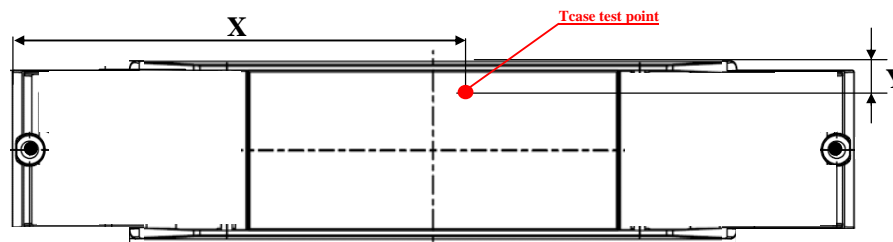

HID-PV m 20-35 / I CDM


X	Y
110±2	10±2

Dimensions in mm.

Lifetime 40k hours/90% survivals:

	$T_{\text{case-max}}$	$T_{\text{ambient-max}}$
HID-PV m 20 / I CDM	80°C	45°C
HID-PV m 35 / I CDM	85°C	45°C

T_{case} HID-PV m PGJ5 20 / I CDM LPF

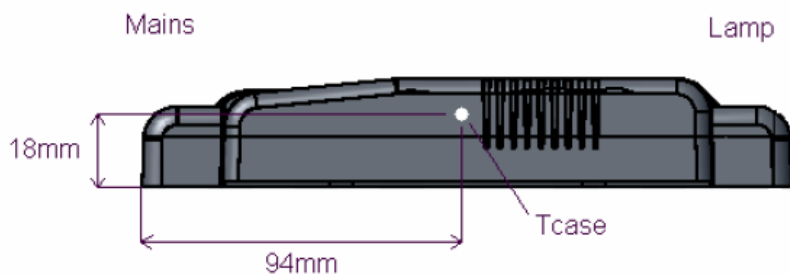

Lifetime 40k hours/90% survivals:

	$T_{\text{case-max}}$	$T_{\text{ambient-max}}$
HID-PV m PGJ5 20 / I CDM LPF	65°C	40°C

Temperature Testing

Because the driver will regulate the lamp to a constant power, the input current will increase when the input voltage is lower. This ultimately will influence the power losses, so the worst-case temperature should therefore be measured at lowest mains voltage of 198V.

To guarantee, that the maximum value of T_{case} is not exceeded, a thermo-couple should be mounted on the T_c point of the driver.

For more information about lifetime and temperature please consult the HID application guide.


6. Wiring

The wiring should be connected according the pictures below. This driver is equipped with a safety earth connection and must be connected to the earth connection of the mains-supply.


For EMI-reasons, it is important to make the "hot" lamp-wire (indicated by the ⚡ symbol) as short as possible.

HID-PV m 20-35 / I CDM


HID-PV m 20 / I CDM

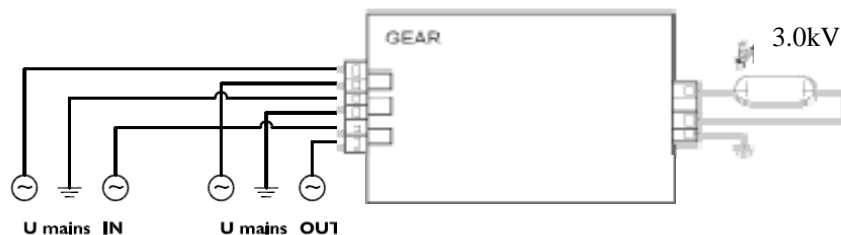

HID-PV m 35 / I CDM

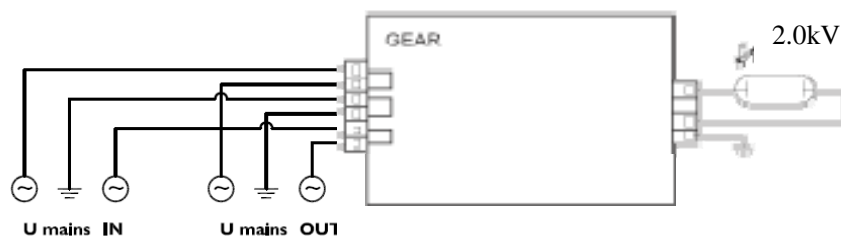

HID-PV m PGJ5 20 / I CDM LPF

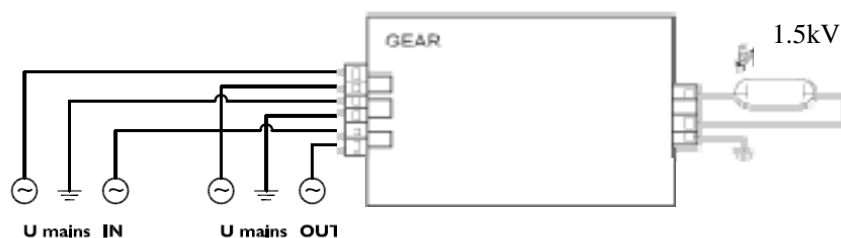

These drivers have a loop-through possibility for the mains-wiring.

Connector type:	WAGO type 804; push in contacts
Wire cross section:	0.75..2.5 mm ² solid or stranded
Strip length	10-11 mm
Max cable capacitance lamp-wires:	200 pF
Maximum length lamp-wires:	2 meter for cable without earth wire. 1 meter for a cable with earth wire.

7. Electro-Magnetic Compatibility

The driver is tested and approved according CISPR 15 ed. 7.2.

However the position of the wiring can negatively influence the EMC behaviour of this HID-system. Therefore it is advised to pay attention to the following:

- Place the mains-wires in such a way, that they are not in parallel with the lamp-wires.
- Make the spacing between lamp- and mains-wires as big as possible.
- Keep the mains-wires close together.


HID-PV m 20-35 /I CDM

- Keep the lamp-wires close together and preferably as short as possible
However do not exceed the maximum allowed length of the lamp-wires.

8. Factory handling

Traceability

For traceability reasons year and week of production, as well as production-location, can be found on the product-label.

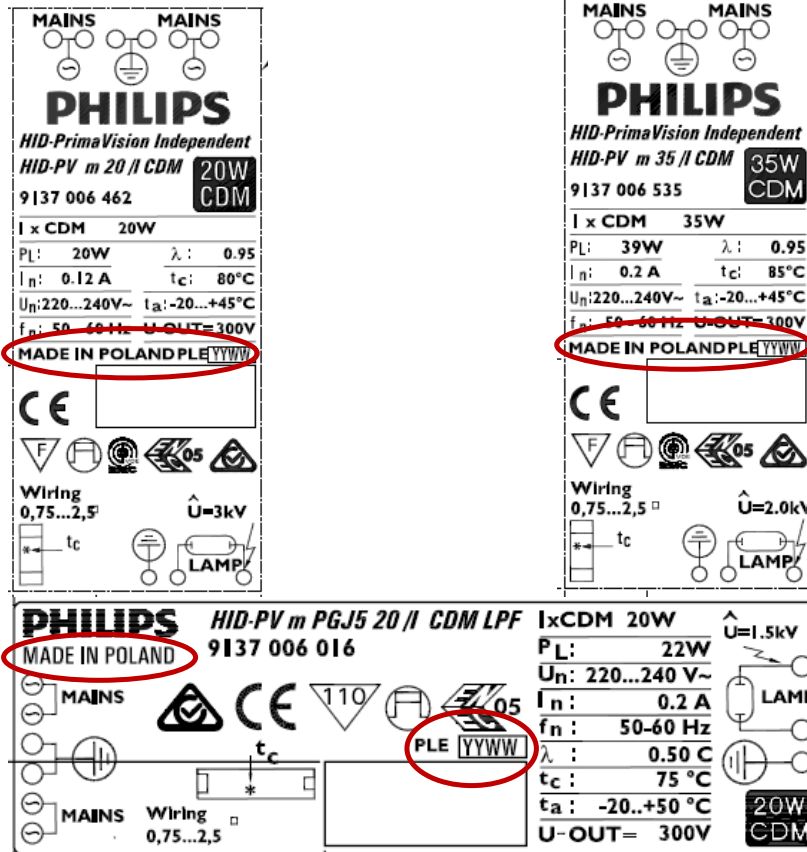

The production-code consists of production year and week.

Example: If a product has been marked 0810 :

- Position 1 and 2 are the last digits from the year of production. The digits 08 indicates that the product has been made in 2008
- Position 3 and 4 indicate the week of production. The number 10 indicates that the product has been made in week 10.
- Furthermore, each product has a serial number, including barcode. (This is depending of the production-location)

9. Installation / Mounting

Lamps that can be driven by the driver

Driver	Lamp
HID-PV m PGJ5 20 /I CDM LPF	CDM-Tm PGJ5 20W
HID-PV m 20 /I CDM	All CDM 20W lamps, except Tm PGJ5
HID-PV m 35 /I CDM	All CDM 35W lamps, except Tm PGJ5

HID-PV m 20-35 /I CDM

Suitable application for this drivers

This product is designed mainly for luminaires that are working in an Indoor environment (IP23 or superior casing).

The PrimaVision Mini range is not intended for Outdoor use due to the following outdoor constraints:

- High humidity and condensation risks
- Vibrations e.g. when the luminaire is mounted on a public lighting pole
- Lightning surges on the mains. Outdoor electronic drivers are 4kV protected but the HID-PV mini drivers are protected up to 2kV.

Therefore, it is the responsibility of the luminaire manufacturer and the installer to take into account the above and implement adequate protection for the above. Here are some requirements for Outdoor applications:

- Place the driver in an IP54 or higher environment
- Avoid placing the driver or luminaire in high poles
- Place adequate Lightning protection in the lighting installation
- Planner should take it into account for Cost of Ownership calculations and maintenance plans.

If the above points are not taken into account in the design and the installation, Philips Lighting Electronics will have the option not to apply the standard guarantee.

Maximum number of drivers per MCB

The maximum number of drivers, which can be connected to a MCB, can be found in the table below:

Driver type	Maximum number of drivers per MCB			
	B16A	B10A	C16A	C10A
HID-PV m PGJ5 20 /I CDM LPF	48	30	81	50
HID-PV m 20 /I CDM	24	15	41	25
HID-PV m 35 /I CDM				
Relative number of drivers	100%	63%	170%	104%

DC-operation

This driver is not designed for DC-operation.

Mounting

The strain-reliefs can be closed by means of (pre-assembled) slotted crosshead screws of the PZ2 type. The maximum allowed torque for mounting the screws is 1.0Nm.

There are several methods to install the driver:

- The driver can be mounted on a solid surface by means of 2 M4 screws.
- The driver can be placed on the ceiling, without any means to fix it. (It is advised, not to place the driver upside down)
- A metal hook can be applied to one of the mounting holes of the driver, to hang it on the construction of the ceiling. (it is advised to have the wires/connectors facing down)

In all this situations, it is important not to cover the driver by any (isolating) material.

HID-PV m 20-35 /I CDM

10. Operating in abnormal conditions

Active Thermal protection

If the driver is used at a too high temperature an internal thermal protection will protect the driver against damage; the driver will switch off the lamp. Mains voltage needs to be reset in order to reset thermal protection.

The thermal protection of HID-PV m PGJ5 20 /I CDM LPF drivers becomes active at $T_{case} > 97^{\circ}\text{C}$.

The thermal protection of HID-PV m 20 /I CDM and HID-PV m 35 /I CDM drivers becomes active at $T_{case} > 90^{\circ}\text{C}$.

Mains voltage

The driver is designed to operate within a operational/safety range of 180-264V. However the performance is guaranteed within the performance range of 198-254V. Within this range, the lamp power is regulated within $\pm 3\%$ of its nominal power.

Under/Over voltage

The driver has a limited protection against over voltage, it is advised to prevent higher mains voltages than +10%. This will however negatively influence the lifetime and reliability. The driver will not start if the mains voltage is lower than 160V.

Lightning and power surges

Protection against surges because of lightning are built in the gear. IEC61547, surge levels: 1.0kV Line to Line and 2.0kV Line to GND

End Of Life (EOL) lamp protection

The driver has a protection against an End Of Life Lamp. The driver will detect this lamp and switch off. The mains has to be reset in order to reset the driver.

Mains dips

If mains dips occur that cause the lamp to extinguish, the driver will automatically re-ignite the lamp after a cooling-down period of approximately 10 minutes.

The driver will try to re-ignite the driver for maximum 30 minutes.

If several mains dips occur in short time, the re-ignite time will be added to this maximum of 30 minutes. After this 30 minutes, the driver will shut-off and the mains needs to be cycled to reset the internal ignition timer in the driver.

11. Advised communication

Philips Lighting Electronics advises to communicate the following information to your customers via your preferred media: Catalogues, brochures, Product datasheets, Mounting instructions, Internet and Intranet.

Technical

Due to lamp characteristics, this driver needs some time to re-ignite (10...15 minutes) after switch off.

When the lamp has reached end of life, the driver will switch off the lamp in order to avoid lamp overheating. After lamp replacement, the mains voltage will have to be reset and the system will work normally. The driver does not need to be

HID-PV m 20-35 /I CDM

replaced. The PrimaVision gear range is equipped with an internal thermo-switch that will prevent loss of driver lifetime due to overheating in the luminaire/installation.

Check also chapter 9 for relevant technical information

Marketing

The use of PrimaVision Compact in your luminaire will provide your customer the following benefits:

- **Flicker free operation**
- **30 to 40% longer lamp lifetime**
- **10% energy saving compared to a Electromagnetic system**
- **Safe and comfortable behaviour when lamp reaches End of Life**

Guarantee

The guarantee of 3 and 5 years for Philips Electronics is applicable for this product. For more information about guarantee, please visit our website:

[Http://www.lampsandgear.philips.com/](http://www.lampsandgear.philips.com/)

12. Frequently Asked Questions

Why is there a specific driver for PGJ5 lamps?

The properties of the CDM-Tm lamps with PGJ5 lamp-holder differ from the ones with the GU6.5 lamp-holder. Therefore it is not possible to exchange these.

Why is the 20W LPF version not potted compared to the other versions?

The dissipation of the 20W LPF is significantly lower and therefore no potting material is needed, to transport the temperature to the outside of the driver.

The housing is made of plastic. Does this give problems with EMC or temperature?

No, the gear is specially developed for the housing. Therefore, no problems with EMC and temperature occur.

Can I use this driver in a 24hr-7days installation?

No, this driver is not suitable for 24/7 operation.

13. For more information

Please contact your local sales representative.

Check OEM application guide for general information about electronic gear.

Visit our web-site www.Philips.com/eHID