

PHILIPS

Xitanium

LED driver



Datasheet

Xitanium FULL Prog LED Xtreme dual-channel drivers

Xi FP 330W 2:0.2-0.75A SNDAE 230V C240 sXt

9290 034 09706

Xitanium FULL Prog LED Xtreme dual-channel drivers

Philips Xitanium Full Programmable dual-channel LED drivers are specifically designed to deliver the highest performance, protection and configurability. The portfolio offers both central and standalone dimming protocols further increasing the energy savings and CO2 reductions achieved with LED lighting. The Xtreme technology ensures maximum robustness and protection combined with a very long lifetime.

In this product family Philips introduces new dual-channel drivers with state-of-the-art features, which offer high value for both OEM customers and end-users. The products can replace the existing programmable outdoor LED drivers and will bring significant improvement in programming, assembly into a luminaire and electrical performance. One of the key features is SimpleSet[®], an easy and fast way to configure the driver in a production environment, without the need to power the driver. Another key feature is dual-channel operation, enabling operation at higher output currents.

Benefits

- Ultimate robustness, offering peace of mind and lower maintenance costs
- Fully programmable LED-drivers designed for the new digital and connected lighting world
- Extended diagnostics via SimpleSet[®] and MultiOne
- Easy to design-in, configure and install for insulation Class I and Class II applications
- Energy savings through high efficiency and via multiple dimming options

Features

- SimpleSet[®], wireless configuration interface
- High surge immunity (CM/DM)
- Long lifetime and robust protection against moisture, vibration and temperature
- Dual-channel outputs supporting parallel operation
- Configurable operating windows (AOC)
- Multiple control interfaces: DALI, AmpDim
- Autonomous dimming via integrated DynaDimmer
- Suitable for central DC operation (DCemDim)
- Thermal protection for driver (DTL) and LED module (MTP)
- Constant Light Output (CLO)
- Adjustable Start-up Time (AST)
- Adjustable Light Output (ALO)
- End-Of-Life indicator (EOL)
- Communication through mains via coded commands
- Compliant per DALI Part 251/252/253

Application

- Road and street lighting
- Area lighting
- Tunnel lighting
- Industrial lighting

Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	202...254	V _{ac}	Performance range
Rated input voltage	230	V _{ac}	
Rated input frequency range	47...63	Hz	Performance range
Rated input current	1.56	A	@ rated output power @ rated input voltage
Max. input current	1.77	A	@ rated output power @ minimum performance input voltage
Rated input power	356	W	@ rated output power @ rated input voltage
Minimum Power factor	0.99		@ rated output power @ rated input voltage
Total harmonic distortion	8	%	@ rated output power @ rated input voltage
Efficiency	93	%	@ rated output power @ rated input voltage @ max. U _{out}
Rated input voltage DC range	186...250	V _{dc}	Performance range
Rated input current DC range	1.12	A _{dc}	Performance range
Input voltage AC range	80...264	V _{ac}	Safety operational range
Input frequency AC range	45...66	Hz	Safety operational range
Input voltage DC range	168...275	V _{dc}	Safety operational range
Standby Power	0.48	W	
Isolation input to output	Double		

Electrical output data

Data below applies to each separate output channel


Specification item	Value	Unit	Condition
Regulation method	Constant Current		
Output voltage	100...300	V _{dc}	
Output voltage max.	350	V	Maximum voltage at open load
Output current	0.05...0.75	A	0.1...1.5A when parallelling both outputs
Output current min programmable	200	mA	
Output current min dimming	50	mA	
Output current tolerance ±	3	%	
Output current ripple LF	≤ 4	%	Ripple = peak / average, < 3kHz
Output current ripple HF	≤ 4	%	
Output P _{st} ^{LM}	≤ 0.06		In entire operating window
Output SVM	≤ 0.07		In entire operating window
Output power	5...165	W	Per channel

Electrical data controls input

Specification item	Value	Unit	Condition
Control method	AmpDim, Coded Mains, DALI, Dynadimmer		Output current amplitude dimming. Please refer to design-in guide at www.philips.com/oem for more controllability details.
Dimming range	10...100	%	For latest DALI certification status please visit www.digitalilluminationinterface.org/products
Isolation controls input to output	Double		acc. IEC61347-1

Wiring and Connections

Specification item	Value	Unit	Type
Input wire cross-section	0.5...1.5	mm ² / AWG	solid / stranded wire
Input wire strip length	8.5...9.5	mm	
Output wire cross-section	0.5...1.5	mm ² / AWG	solid / stranded wire
Output wire strip length	8.5...9.5	mm	
Control wire cross-section	0.5...1.5	mm ² / AWG	solid / stranded wire
Control wire strip length	8.5...9.5	mm	
Maximum cable length	2.5	m	CISPR15: between driver and LED module
Maximum NTC output cable length	0.6	m	

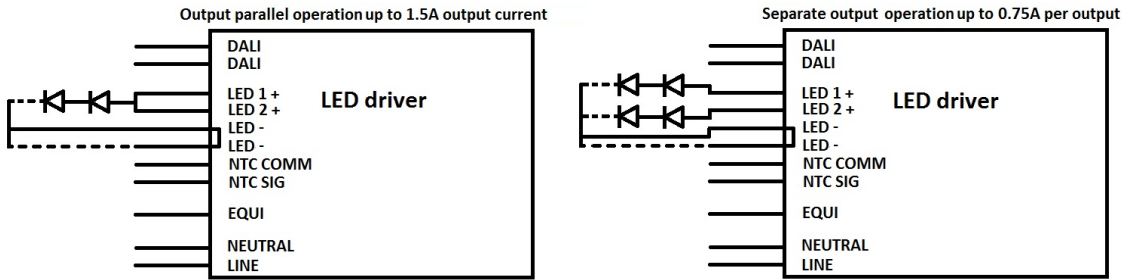


Insulation

Insulation per IEC61347-1	Mains	EQUI	LED + NTC	DALI
Mains		Double	Double	Basic
EQUI	Double		Basic	Double
LED + NTC	Double	Basic		Double
DALI	Basic	Double	Double	

Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	239.7	mm	
Mounting hole distance (A2)	224.6	mm	
Length (A3)	226.2	mm	
Width (B1)	118	mm	
Width (B2)	63.8	mm	
Width (B3)	102.7	mm	
Height (C1)	38	mm	
Mounting hole diameter (D1)	4.8	mm	
Weight	1700	gram	

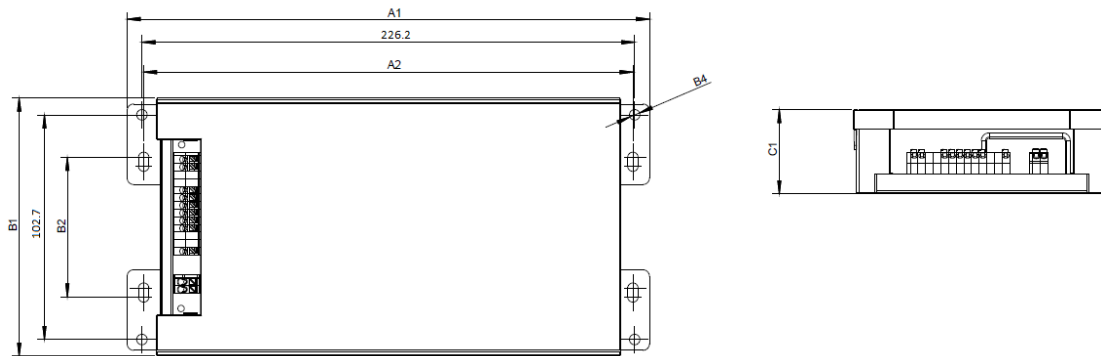

Logistical data


Specification item	Value
Product name	Xi FP 330W 2:0.2-0.75A SNDAE 230V C240 sXt
EOC	871951441529400
Logistic code 12NC	9290 034 09706
EAN1 (GTIN)	8719514415294
EAN3 (box)	8719514415300
Pieces per box	4

Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40...+55	°C	Higher ambient temperature allowed as long as T _{case-max} is not exceeded
T _{case-max}	90	°C	Maximum temperature measured at T _{case-point}
T _{case-life}	80	°C	Measured at T _{case-point}
Maximum housing temperature	130	°C	In case of a failure, inherent by design
Relative humidity	10...90	%	Non-condensing

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	100,000	hours	Measured temperature at Tcase-point is Tcase-life. Maximum failures = 10%

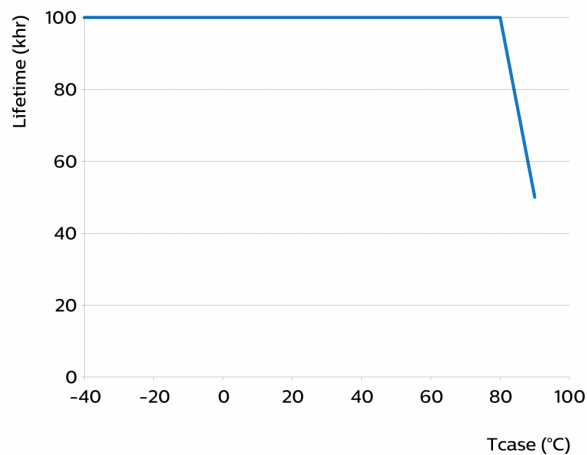

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40...+85	°C	
Relative humidity	5...95	%	Non-condensing

Programmable features


Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	Programmable, SimpleSet	700 mA	
LED Module Temperature Protection (MTP)	Yes	OFF	
Driver Temperature Limit (DTL)	Yes	ON	
Adjustable Light Output (ALO)	Yes	OFF	
Constant Light Output (CLO)	Yes	OFF	
Adjustable Start-up Time (AST)	Yes	1 s	
Integrated Dynadimmer	Yes	OFF	5-step, light turn-off possible
AmpDim	Yes	OFF	
Min Dim Level	Yes	10 %	
DC emergency (DCemDim)	Yes	ON	Default: AOC = 15%. EOFx = 10 ... 60%. No external DC rated fuse required. Internal fuse rating: T6.3A 250VAC/DC.
End Of Life indicator (EOL)	Yes	OFF	
Coded Mains	Yes	OFF	
OEM Write Protection (OWP)	Yes	OFF	
Luminaire Info (DALI part 251)	Yes	—	
Energy metering (DALI part 252)	Yes	—	Accuracy: 10%
Diagnostics (DALI part 253)	Yes		
DALI 253 M	Yes	—	

Features

Specification item	Value		Condition
Open load protection	Yes		Automatic recovering
Short circuit protection	Yes		Automatic recovering
Over power protection	Yes		Automatic recovering
Hot wiring	No		
Suitable for fixtures with protection class	I and II		per IEC60598
Overtemperature protection	Yes		Automatic recovering
Inrush Limiter type	SoftStart		

Inrush current

Specification item	Value	Unit	Condition
Inrush current	13	A	Input voltage 230V
Inrush peak width	1320	μ s	Input voltage 230 V, measured at 50% height
Drivers / MCB 16A / Fuse 16A	7	pcs	Based on rated full output power

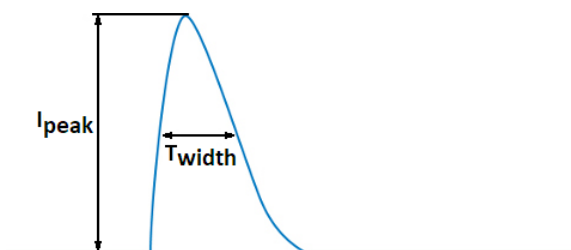

Please refer to the driver design in guide if you use other MCB-types.

Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Touch Current (ins. Class II)	0.6	mA peak	Acc. IEC61347-1. LED module contribution not included
Typical Protective Conductor Current (ins. Class I)	0.45	mA rms	Acc. IEC60598-1. LED module contribution not included

Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	6	kV	L - N acc. IEC61000-4-5, 2 Ohm, 1.2/50us, 8/20us
Mains surge immunity (comm. mode)	10	kV	L/N - EQUI: 10kV acc. EN61547, 8kV acc. IEC61000-4-5, 12 Ohm 1.2/50us,8/20us
Control surge immunity (diff. mode)	0.9	kV	DALI - DALI acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Control surge immunity (comm. mode)	4	kV	DALI - EQUI, acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us
Control surge immunity (comm. mode)	8	kV	DALI - L/N acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us

Application Info


Specification item	Value
Approval marks and Certifications	CCC / CE / DALI 2 / Double-insulated Built-In / EAC / EL / ENEC / RCM / UA / UKCA / WEEE
Ingress Protection classification (IP)	20
Application	Outdoor
Mounting Type	Built-in

Graphs


Operating window

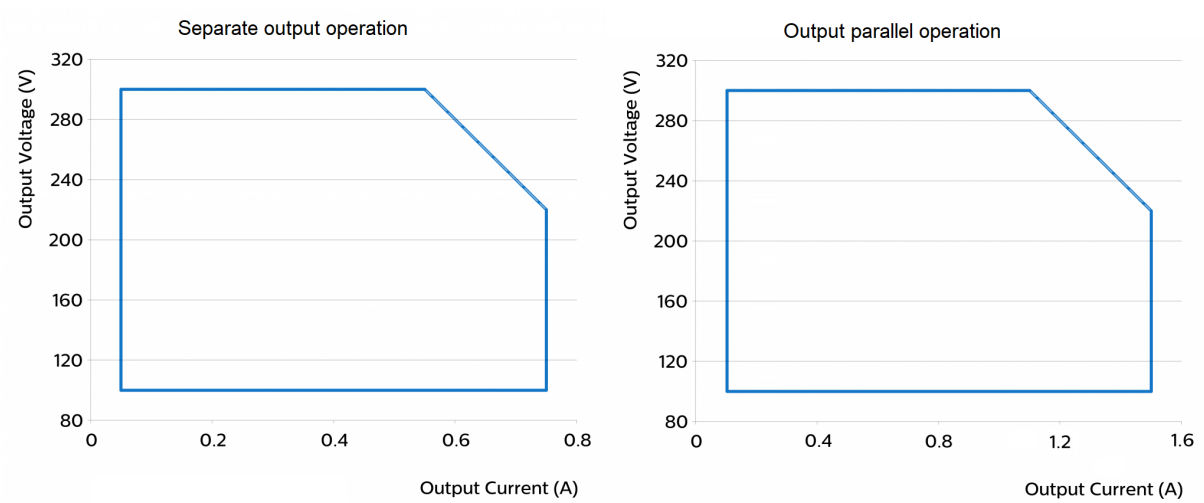


Thermal Guard

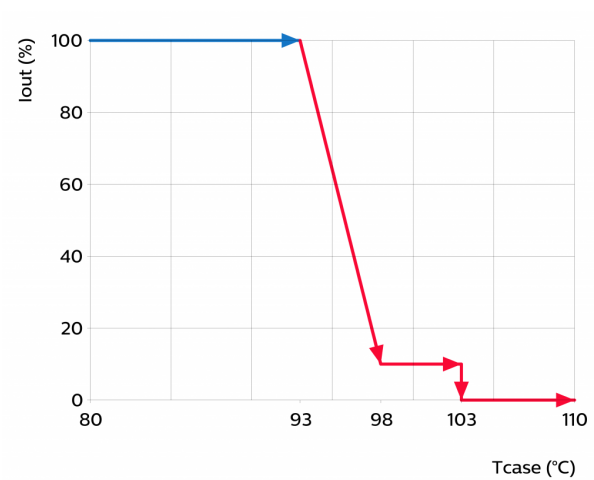


Mains Guard

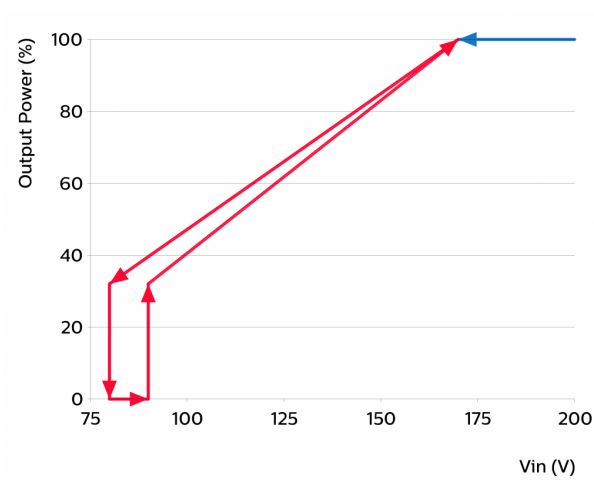


Power factor versus output power

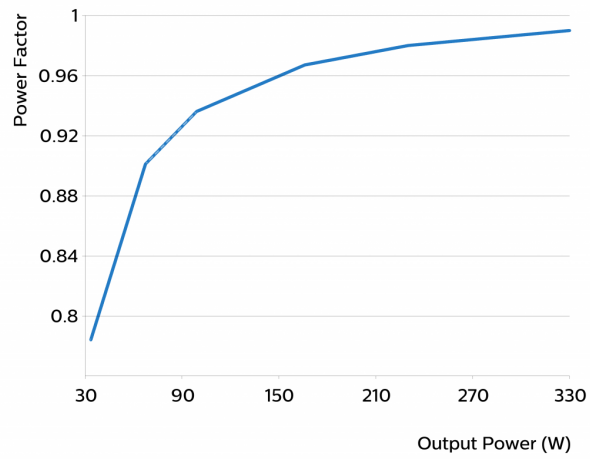

Efficiency versus output power

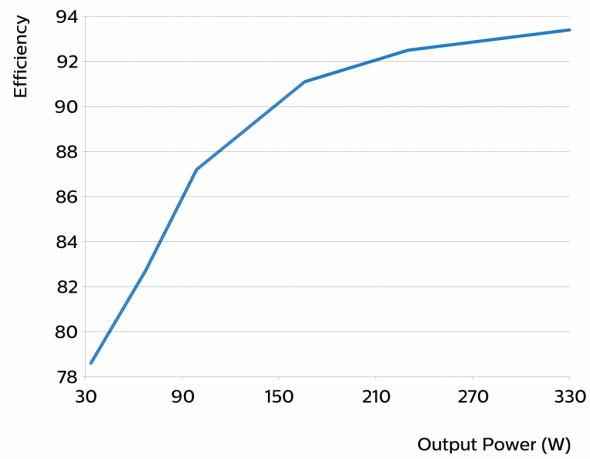

THD versus output power

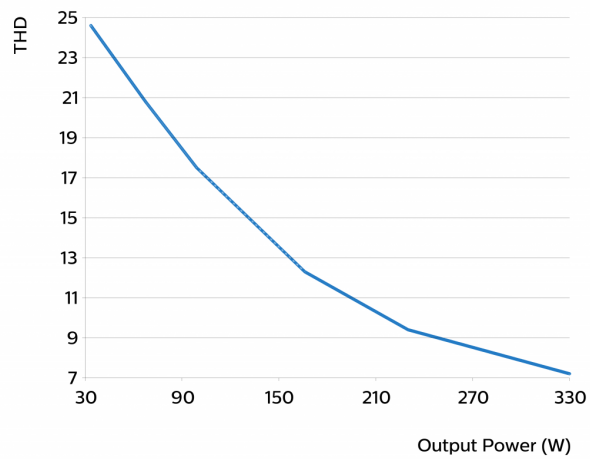

Notes

Important information about dual-channel operation:

- Both outputs share a common minus (LED - terminal)
- Both channels are allowed to be put in parallel to increase output current up to 1.5A
- Outputs cannot be connected in series
- Configured output current (AOC) applies to both channels simultaneously
- Output loading in Watt of the channels is allowed to be unequal

Fusing information:

This driver is equipped with a SoftStart inrush current limiter. As a consequence, the limit on the number of drivers connected to an MCB/melting fuse is based on either the aggregate inrush current or the steady-state input current and defined by whatever limit is reached first.

Max. recommended amount of drivers based on inrush current is 7 per 16A MCB B type.

Max. recommended amount of drivers per 16A MCB (C, D type) is 9 and based on max. steady-state input current at rated output power.

Wiring:

- Minimum recommended input wiring cross section area: 0.75mm²
- Minimum recommended output wiring cross section area: 0.5mm² up to 1.0A
- Minimum recommended output wiring cross section area: 0.75mm² above 1.0A



©2022 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.

UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: March 17, 2022 v1

www.philips.com/oem