


# PHILIPS

## Xitanium

### LED driver

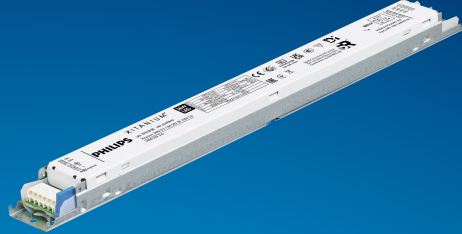

## Datasheet

### Xitanium isolated SR dimmable & programmable G2

Xitanium 36W 0.3-1.0A 54V SR 230V G2

9290 029 33606

Because light is all around us, the lighting infrastructure is an ideal platform for collecting and carrying information. The Philips Xitanium SR drivers are Sensor Ready. They comply with the D4i standard, making it much easier to mount sensors and communication devices on luminaires. Furthermore, D4i drivers have the capability to store and report a wide range of luminaire, energy and diagnostics data in a standardized format.

#### Benefits

- Sensor Ready concept, ideal for use with indoor sensors & building management systems
- Integrated power supply to power sensors and wireless radios directly from the driver
- Communication between the sensor or wireless radio and the driver is according to the D4i standard
- Highly accurate integrated power metering for use in building management systems
- Suitable for central emergency DC operation

#### Features

- SELV
- D4i certified
- SimpleSet configuration interface (NFC)
- Configurable operating windows (AOC)
- Dimming supported during DC operation (DCemDim)
- Constant Light Output (CLO)
- Adjustable Light Output (ALO)
- OEM Write Protection (OWP)
- Integrated Bus Power Supply for sensors and radios (DALI part 250)
- Memory Bank 1 Extension / Luminaire Data (DALI part 251)
- Energy Reporting (DALI part 252)V
- Diagnostics & Maintenance (DALI part 253)

#### Application

- Offices
- Healthcare
- Education
- Retail: supermarkets, shopping malls

## Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	220...240	V <sub>ac</sub>	Performance range
Rated input voltage	230	V <sub>ac</sub>	
Rated input frequency range	50...60	Hz	Performance range
Rated input current	0.19	A	@ full output power @ rated input voltage
Rated input power	42	W	@ rated output power @ rated input voltage
Nominal Power factor	0.98		@ rated output power @ rated input voltage
Total harmonic distortion	4	%	@ rated output power @ rated input voltage
Efficiency	88	%	@ full output power @ rated input voltage @ max. I <sub>out</sub> , no load on SR
Rated input voltage DC range	186...250	V <sub>dc</sub>	Performance range
Rated input current DC range	0.22	A <sub>dc</sub>	Performance range
Input voltage AC range	198...264	V <sub>ac</sub>	Operational range
Input frequency AC range	45...66	Hz	Operational range
Input voltage DC range	168...275	V <sub>dc</sub>	Operational range
Standby Power (no load)	0.25	W	No load on SR/DALI @230Vac cfr. IEC62442-3
Standby Power (with load)	1	W	250mW load on SR/DALI @ 230Vac cfr. IEC62442-3
Isolation input to output	SELV		

## Electrical output data

Specification item	Value	Unit	Condition
Regulation method	Constant Current		
Output voltage	27...54	V <sub>dc</sub>	
Output voltage max.	60	V	Maximum output voltage (rms)
Output current	0.3...1	A	
Output current tolerance ±	5	%	@full load
Output current ripple LF	≤ 4	%	Ripple = peak / average, < 3kHz
Output current ripple HF	≤ 4	%	
Output P <sub>st</sub> <sup>LM</sup>	≤ 0.2		In entire operating window
Output SVM	≤ 0.1		In entire operating window
Output power	10...36	W	

## Electrical data controls input

Specification item	Value	Unit	Condition
Control method	SR		Output current amplitude dimming. Please refer to design-in guide at <a href="http://www.philips.com/oem">www.philips.com/oem</a> for more controllability details.
Dimming range	1...100	%	>700mA 1% dimming; < 700mA min. current 7mA
Isolation controls input to output	Double		acc. IEC61347-1
SR output voltage max.	20	V	
SR output current	52	mA	
SR maximum current	60	mA	

## Wiring and Connections

Specification item	Value	Unit	Type
Input wire cross-section	0.5...1.5 / 20...16	mm² / AWG	WAGO744, solid wire
Input wire strip length	8...9	mm	
Output wire cross-section	0.5...1.5 / 20...16	mm² / AWG	WAGO744, solid wire
Output wire strip length	8...9	mm	
Control wire cross-section	0.5...1.5 / 20...16	mm² / AWG	WAGO744, solid wire
Control wire strip length	8...9	mm	
Maximum cable length	2	m	CISPR15: total length of wiring incl. LED module
Loop Through	Output		




## Isolation

Insulation per IEC61347-1	Input	Output	DA	Housing
Input	-	SELV	SELV	Basic
Output	SELV	-	SELV	Basic
DA	SELV	SELV	-	Basic
Housing	Basic	Basic	Basic	-

## Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	360	mm	
Mounting hole distance (A2)	350	mm	
Width (B1)	30	mm	
Height (C1)	21	mm	
Mounting hole diameter (D1)	4.1	mm	
Weight	270	gram	

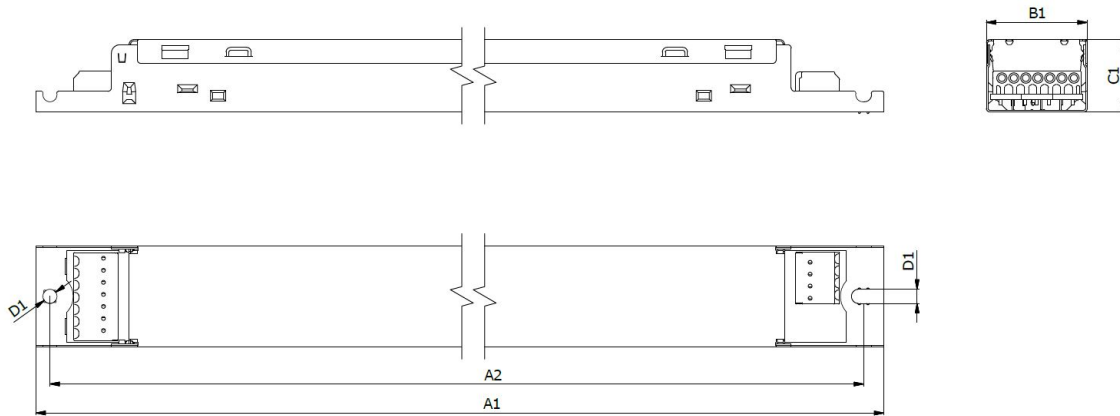

## Logistical data


Specification item	Value
Product name	Xitanium 36W 0.3-1.0A 54V SR 230V G2
Logistic code 12NC	9290 029 33606
Pieces per box	24

## Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+50	°C	Higher ambient temperature allowed as long as T <sub>case-max</sub> is not exceeded
T <sub>case-max</sub>	75	°C	Maximum temperature measured at T <sub>case-point</sub>
T <sub>case-life</sub>	65	°C	Measured at T <sub>case-point</sub>
Maximum housing temperature	110	°C	In case of a failure, inherent by design
Relative humidity	10...90	%	Non-condensing

## Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	100,000	hours	Measured temperature at Tcase-point is Tcase-life. Maximum failures = 10%

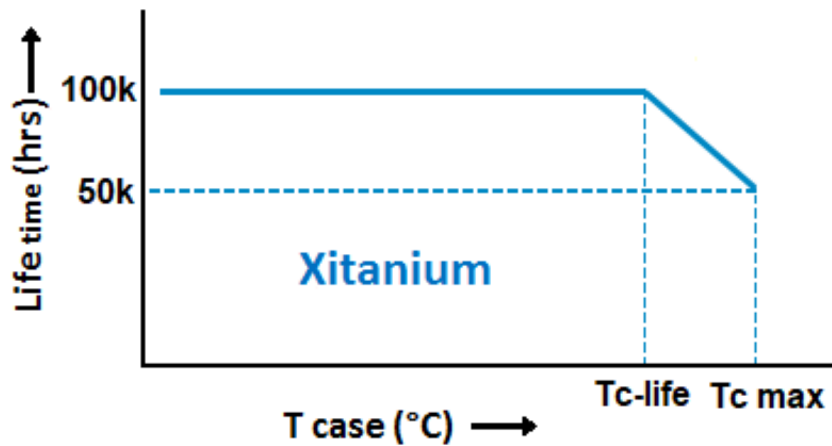

## Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+85	°C	
Relative humidity	5...95	%	Non-condensing

## Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	Programmable, SimpleSet	300 mA	
NTC on LEDset	No		
Adjustable Light Output (ALO)	Yes	OFF	
Constant Light Output (CLO)	Yes	OFF	
Min Dim Level	Yes	1 %	
DC emergency (DCemDim)	Yes	ON	Default: AOC = 15%. EOFx = 1 ... 100%. No external DC rated fuse required. Internal fuse rating: T1A 250VAC/DC
DALI control supported at DC operation	Yes	OFF	
OEM Write Protection (OWP)	Yes	OFF	
SR PSU (DALI part 250)	Yes		
Luminaire Info (DALI part 251)	Yes	—	
Energy metering (DALI part 252)	Yes	—	Accuracy 4%
Diagnostics	Yes	—	
Diagnostics (DALI part 253)	Yes	—	
DALI 253 M	Yes	—	

## Features

Specification item	Value	Condition
Open load protection	Yes	Automatic recovering
Short circuit protection	Yes	Automatic recovering
Over power protection	Yes	Automatic recovering
Hot wiring	No	
Suitable for fixtures with protection class	I	per IEC60598

## Inrush current

Specification item	Value	Unit	Condition
Inrush current	14.7	A	Input voltage 230V
Inrush peak width	190	μs	Input voltage 230 V, measured at 50% height
Drivers / MCB 16A type B	≤ 42	pcs	Indicative value at 230V



Please refer to the driver design in guide if you use other MCB-types.

## Driver touch current / protective conductor current / earth leakage current



Specification item	Value	Unit	Condition
Typical Touch Current (ins. Class II)	0.7	mA peak	Acc. IEC61347-1. LED module contribution not included
Typical Protective Conductor Current (ins. Class I)	0.5	mA rms	Acc. IEC60598-1. LED module contribution not included

## Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	1	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Mains surge immunity (comm. mode)	2	kV	Acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us
Control surge immunity (diff. mode)	0.03	kV	DA - DA acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Control surge immunity (comm. mode)	1	kV	DA - PE acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us
Control surge immunity (comm. mode)	1	kV	DA - L/N acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us

## Application Info


Specification item	Value
Approval marks and Certifications	CCC / CE / D4i / EAC / EL / ENEC / RCM / SELV / UA / WEEE
Ingress Protection classification (IP)	20
Noise and hum dB(A)	20
Application	Indoor Linear
Mounting Type	Built-in

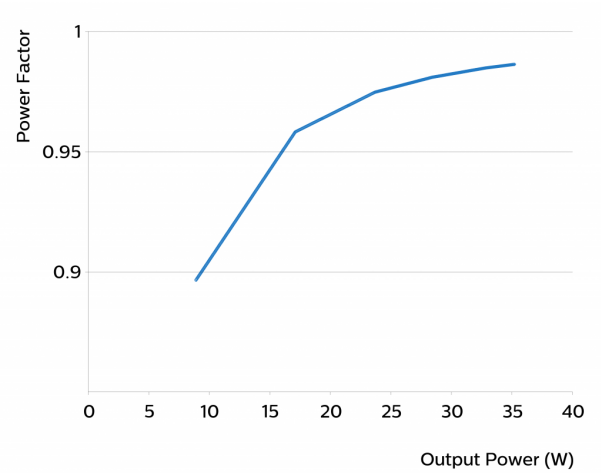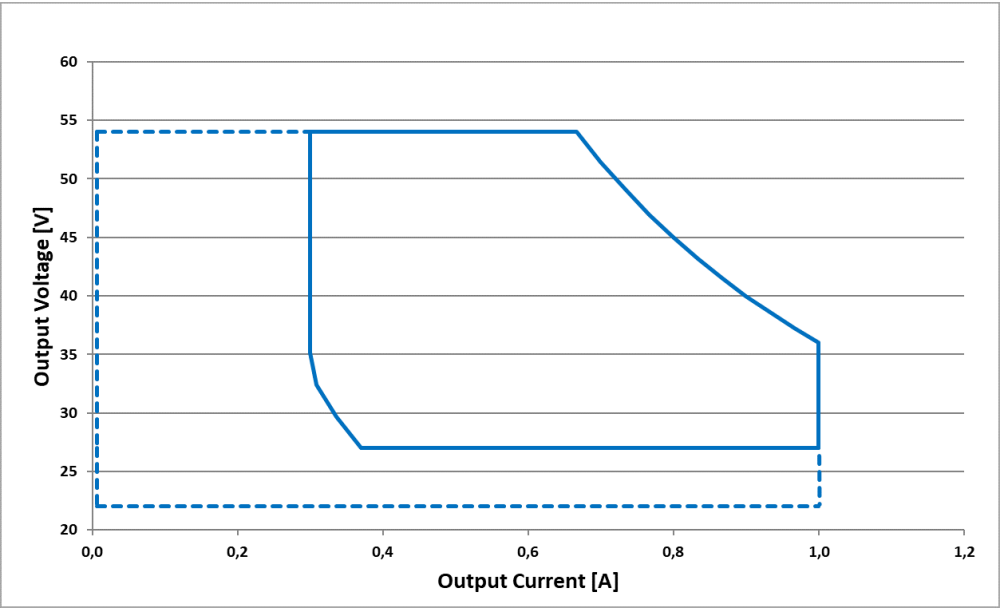

## Efficiency versus output power

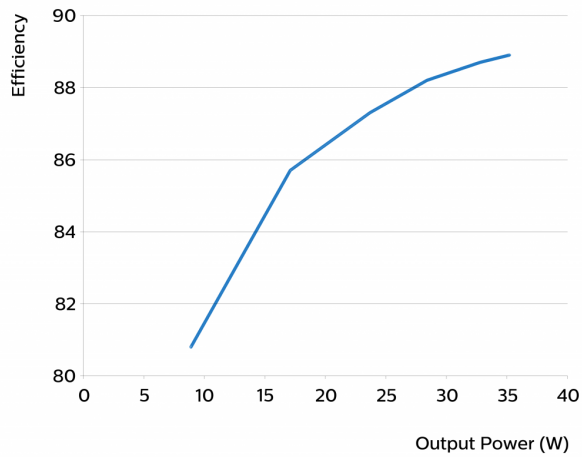

## THD versus output power

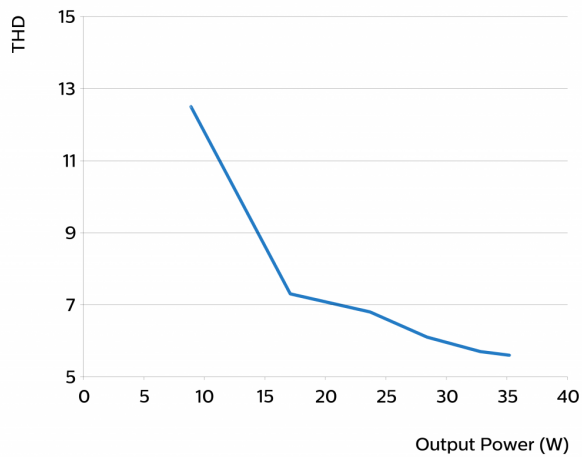

©2022 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.  
UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: September 8, 2022 v2

[www.philips.com/oem](http://www.philips.com/oem)