


# PHILIPS

## Xitanium

### LED driver

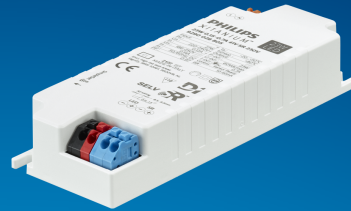

## Datasheet

### LED drivers – Extreme Small

Xitanium 12W 0.08-0.5A 25V SR 230V

9290 028 80406

#### Enabling future-proof LED technology

Xitanium LED drivers are designed to operate LED solutions for general lighting applications. Reliability is enhanced by features that protect the connected LED module, e.g. hot wiring, reduced ripple current and thermal derating. Most drivers feature central DC operation. In the coming years LEDs will continue to increase in efficiency, creating challenges for OEMs. With Xitanium LED drivers, flexibility in luminaire design is assured thanks to an adjustable output current. Application-oriented operating windows offer stable lumen output and light quality levels that specifiers and architects demand. The adjustable output current also enables operation of various LED PCB solutions from different manufacturers.

#### Benefits

- High reliability underpinned by 5 year warranty
- Future-proof flexibility - application-oriented operating windows enable LED generation and complexity management
- Compatibility - can also be used for other manufacturers' modules or OEMs' own PCB designs

#### Features

- Configurable operating window (AOC) via SimpleSet
- Wide range of power ratings
- Housing for independent use with strain relief and loop through or built-in for Spot- and down-lighting

#### Application

- Retail
- Office

## Electrical input data

| Specification item           | Value     | Unit            | Condition  |
|------------------------------|-----------|-----------------|--|
| Rated input voltage range    | 220...240 | V <sub>ac</sub> | Performance range                                      |
| Rated input voltage          | 230       | V <sub>ac</sub> |  |
| Rated input frequency range  | 50...60   | Hz              | Performance range                                      |
| Rated input current          | 0.07      | A               | @ rated output power @ rated input voltage             |
| Max. input current           | 0.08      | A               | @ rated output power @ min. performance input voltage  |
| Rated input power            | 14.5      | W               | @ rated output power @ rated input voltage             |
| Nominal Power factor         | 0.96      |                 | @ rated output power @ rated input voltage             |
| Total harmonic distortion    | 8         | %               | @ rated output power @ rated input voltage             |
| Efficiency                   | 82.6      | %               | @ rated output power @ rated input voltage @ max. lout |
| Rated input voltage DC range | 186...250 | V <sub>dc</sub> | Performance range                                      |
| Rated input current DC range | 0.08      | A <sub>dc</sub> | Performance range                                      |
| Input voltage AC range       | 198...264 | V <sub>ac</sub> | Safety operational range                               |
| Input frequency AC range     | 45...66   | Hz              | Safety operational range                               |
| Input voltage DC range       | 168...275 | V <sub>dc</sub> | Safety operational range                               |
| Standby Power (no load)      | 0.5       | W               | Excl. consumption by sensors connected to the DA bus   |
| Isolation input to output    | SELV      |                 |  |

## Electrical output data

| Specification item                   | Value            | Unit            | Condition                      |
|--------------------------------------|------------------|-----------------|--------------------------------|
| Regulation method                    | Constant Current |                 |                                |
| Output voltage                       | 8...25           | V <sub>dc</sub> |                                |
| Output voltage max.                  | 60               | V               | Maximum voltage at open load   |
| Output current                       | 0.08...0.5       | A               |                                |
| Output current min programmable      | 80               | mA              |                                |
| Output current min dimming           | 3.5              | mA              |                                |
| Output current tolerance ±           | 5                | %               | @full load                     |
| Output current ripple LF             | ≤ 4              | %               | Ripple = peak / average < 3kHz |
| Output P <sub>st</sub> <sup>LM</sup> | ≤ 0.42           |                 | In entire operating window     |
| Output SVM                           | ≤ 0.02           |                 | In entire operating window     |
| Output power                         | 3.6...12         | W               |                                |

## Electrical data controls input

| Specification item                 | Value         | Unit | Condition   |
|------------------------------------|---------------|------|---|
| Control method                     | SR            |      | Output current amplitude dimming. See design-in guide at <a href="http://www.philips.com/oem">www.philips.com/oem</a> for more controllability details. |
| Dimming range                      | 1...100       | %    | Acc. D4i. See <a href="http://www.digitalilluminationinterface.org/products">www.digitalilluminationinterface.org/products</a>                          |
| Isolation controls input to output | Supplementary |      | acc. IEC61347-1   |
| SR output voltage max.             | 22.5          | V    |   |
| SR output current                  | 52            | mA   |   |
| SR maximum current                 | 60            | mA   |   |

## Wiring and Connections

| Specification item         | Value     | Unit                  | Type                                   |
|----------------------------|-----------|-----------------------|--|
| Input wire cross-section   | 0.5...1.5 | mm <sup>2</sup> / AWG | solid / stranded wire                  |
| Input wire strip length    | 8.5...9.5 | mm                    |  |
| Output wire cross-section  | 0.5...1.5 | mm <sup>2</sup> / AWG | solid / stranded wire                  |
| Output wire strip length   | 8.5...9.5 | mm                    |  |
| Control wire cross-section | 0.5...1.5 | mm <sup>2</sup> / AWG | solid / stranded wire                  |
| Control wire strip length  | 8.5...9.5 | mm                    |  |
| Maximum cable length       | 0.6       | m                     | CISPR15: between driver and LED module |




## Isolation

| Insulation per IEC61347-1 | Mains      | LED           | DA            |
|---------------------------|------------|---------------|---------------|
| Mains                     | -          | SELV          | Reinforced    |
| LED                       | SELV       | -             | Supplementary |
| DA                        | Reinforced | Supplementary | -             |

## Dimensions and weight

| Specification item          | Value            | Unit | Tolerance (mm) |
|-----------------------------|------------------|------|----------------|
| Length (A1)                 | 115              | mm   |                |
| Mounting hole distance (A2) | 108              | mm   |                |
| Width (B1)                  | 42.2             | mm   |                |
| Width (B2)                  | 33.5             | mm   |                |
| Height (C1)                 | 21               | mm   |                |
| Mounting hole diameter (D1) | 4.1              | mm   |                |
| Weight                      | 75               | gram |                |
| Housing color               | White (RAL 9016) |      |                |

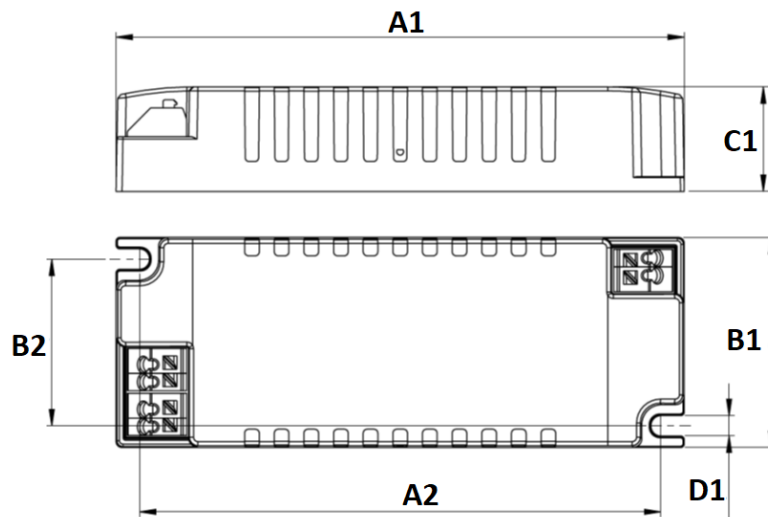

## Logistical data


| Specification item | Value                              |
|--------------------|------------------------------------|
| Product name       | Xitanium 12W 0.08-0.5A 25V SR 230V |
| EOC                | 871951435727300                    |
| Logistic code 12NC | 9290 028 80406                     |
| EAN1 (GTIN)        | 8719514357273                      |
| EAN3 (box)         | 8719514357280                      |
| Pieces per box     | 48                                 |

## Operational temperatures and humidity

| Specification item          | Value     | Unit | Condition   |
|-----------------------------|-----------|------|---|
| Ambient temperature         | -20...+50 | °C   | Higher ambient temperature allowed as long as T <sub>case-max</sub> is not exceeded |
| T <sub>case-max</sub>       | 75        | °C   | Maximum temperature measured at T <sub>case-point</sub>                             |
| T <sub>case-life</sub>      | 75        | °C   | Measured at T <sub>case-point</sub>   |
| Maximum housing temperature | 110       | °C   | In case of a failure, inherent by design  |
| Relative humidity           | 10...90   | %    | Non-condensing  |

## Lifetime

| Specification item | Value  | Unit  | Condition   |
|--------------------|--------|-------|---|
| Driver lifetime    | 50,000 | hours | Measured temperature at Tcase-point is Tcase-life. Maximum failures = 10% |

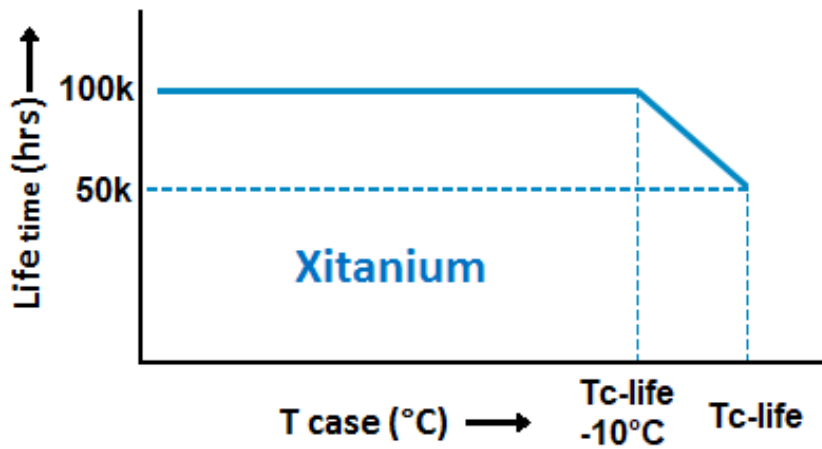

## Storage temperature and humidity

| Specification item  | Value     | Unit | Condition      |
|---------------------|-----------|------|----------------|
| Ambient temperature | -25...+85 | °C   |                |
| Relative humidity   | 5...95    | %    | Non-condensing |

## Programmable features

| Specification item                      | Available               | Default setting | Condition                                   |
|---|-------------------------|-----------------|---|
| Set Adjustable Output Current (AOC)     | Programmable, SimpleSet | 80 mA           | Place SimpleSet tool at top of the driver   |
| Adjustable Light Output (ALO)           | Yes                     | OFF             |   |
| Adjustable Light Output (ALO) min level | Yes                     | OFF             |   |
| Constant Light Output (CLO)             | Yes                     | OFF             |   |
| Min Dim Level                           | Yes                     | 1 %             |   |
| DC emergency (DCemDim)                  | Yes                     | ON              | Default level: 15%. EOFx range = 1 .. 100%. |
| DALI control supported at DC operation  | Yes                     | OFF             |   |
| OEM Write Protection (OWP)              | Yes                     | OFF             |   |
| SR PSU (DALI part 250)                  | Yes                     | ON              |   |
| Luminaire Info (DALI part 251)          | Yes                     | —               |   |
| Energy metering (DALI part 252)         | Yes                     | —               | Accuracy = 4%                               |
| Diagnostics                             | Yes                     | —               | SR diagnostics                              |
| Diagnostics (DALI part 253)             | Yes                     | —               |   |
| DALI 253 M                              | Yes                     | —               |   |

## Features

| Specification item                          | Value    | Condition            |
|---|----------|----------------------|
| Open load protection                        | Yes      | Automatic recovering |
| Short circuit protection                    | Yes      | Automatic recovering |
| Over power protection                       | Yes      | Automatic recovering |
| Hot wiring                                  | No       |                      |
| Suitable for fixtures with protection class | I and II | per IEC60598         |

## Inrush current

| Specification item       | Value | Unit | Condition                                   |
|--------------------------|-------|------|---|
| Inrush current           | 8.1   | A    | Input voltage 230V                          |
| Inrush peak width        | 27    | μs   | Input voltage 230 V, measured at 50% height |
| Drivers / MCB 16A type B | ≤ 40  | pcs  | Indicative value at 230V                    |



Please refer to the driver design in guide if you use other MCB-types.

## Driver touch current / protective conductor current / earth leakage current

| Specification item                    | Value | Unit    | Condition   |
|---------------------------------------|-------|---------|---|
| Typical Touch Current (ins. Class II) | 0.7   | mA peak | Acc. IEC61347-1. LED module contribution not included |

## Surge immunity


| Specification item                | Value | Unit | Condition   |
|-----------------------------------|-------|------|---|
| Mains surge immunity (diff. mode) | 1     | kV   | L-N acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us          |
| Mains surge immunity (comm. mode) | 2     | kV   | L/N - EQUI: acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us |

## Application Info


| Specification item                     | Value  |
|--|--|
| Approval marks and Certifications      | CCC / CE / D4i / Double-insulated Built-In / EL / ENEC / RCM / SELV / SR / UKCA / WEEE |
| Ingress Protection classification (IP) | 20   |
| Noise and hum dB(A)                    | 20   |
| Application                            | Indoor Point   |
| Mounting Type                          | Built-in   |

Graphs


Operating window

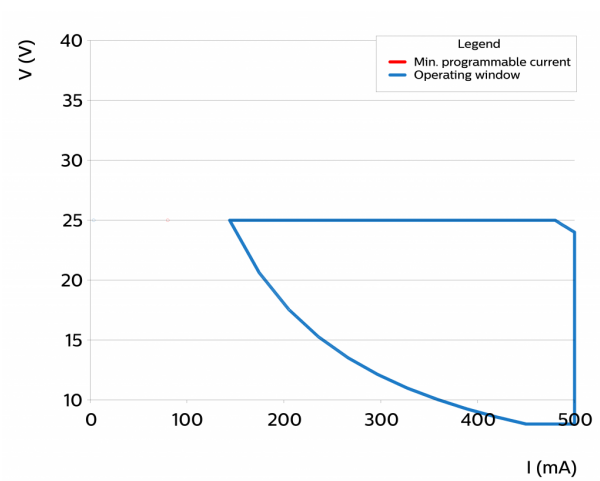


Power factor versus output power

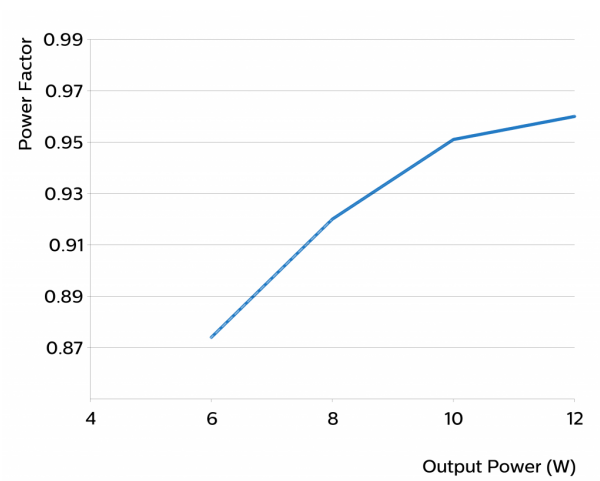

Efficiency versus output power

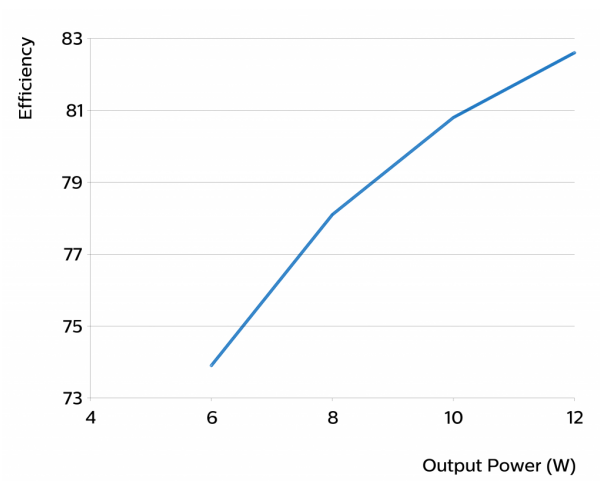

## THD versus output power

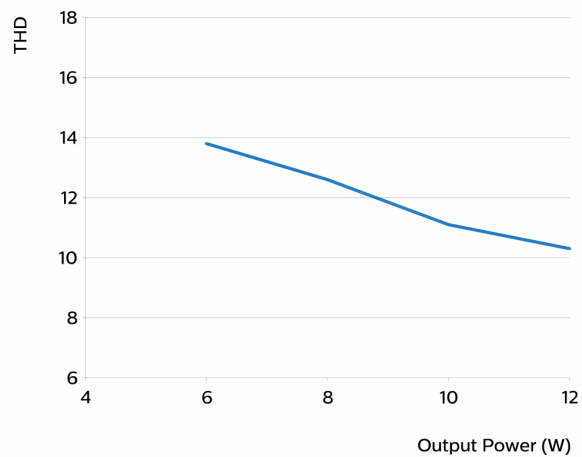

©2022 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.  
UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.  
Date of release: November 10, 2022 v1

[www.philips.com/oem](http://www.philips.com/oem)