




Ordering 12 NC	9290 034 26906
Brand Name	Philips
Description	LED Transformer 24W 12V 2A 12VDC
Model Number	C024C200V012FNP3AI
Input Voltage	220 - 240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Approved


Output Power (W)	Output Voltage (VDC)	Output Current (A)	Efficiency at Max Load (%)	Max Case Temp (°C)	Input Current (Arms)	Max Input Power (W)	THD @ Max Load (%)	Power Factor @Max Load	Surge Protection Diff.(KV)	Weight (Kg)	Envir. Protection Rating
24	12	2	240V	80	240V	28	≤#82 @Max Load	≥ 0.8	2	0.140	IP 20
			>82		0.144						

Wiring Diagram

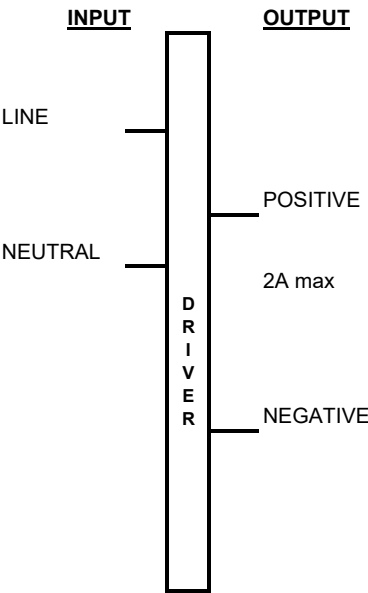

Input Terminal
2 Wire L(brown),N(blue)
Output Terminal
2 Wire +ve(red), -ve(black)


Enclosure

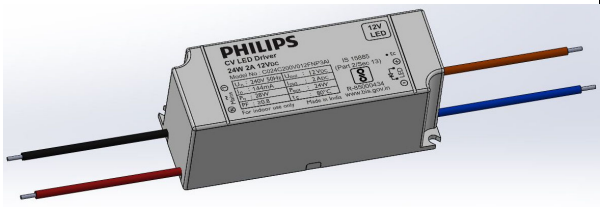

	(mm)
Case Length	87.06
Case Width	33.22
Case Height	32
Mounting Length	87.06

PHILIPS

Ordering 12 NC	9290 034 26906
Brand Name	Philips
Description	LED Transformer 24W 12V 2A 12VDC
Model Number	C024C200V012FNP3AI
Input Voltage	220 - 240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Approved

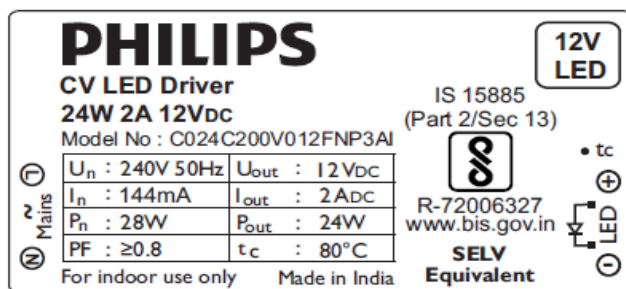

Product Data	
Full product code	9290 034 26906
Full product name	LED Transformer 24W 12V 2A GEN2
Net weight per piece	140 gms
Dimming	None (FIXED)
Ambient Temp. Range	-10C to +35C
Line Voltage (AC Nominal)	220 - 240V +/-10%
Line Voltage (AC Operating Range)	140 - 300V
Line Current	0.144A @ 240V
Line Frequency	50 Hz
Envir. Protection Rating	IP 20 (Potted)
Life at Tc 90 dgree C	30000 hrs (nom.)
Suitable For Indoor Use	Yes
Tc - Max.	80°C
Max. Driver number on MCB 16A (Type B)	12 (max.)
Input Over Voltage Protection	Withstands 320V for 48 Hours Withstands 350V for 2 Hours
Output Voltage Tolerance	+/- 5% of Imax
THD Total	$\leq 60\%$ @ Full Load @ 240V Supply
P.F. at Max. Load	≥ 0.8
Isolation (Input - Output)	3.75KV
Protection	Short Circuit and Open Circuit Protection for LED + and LED -
Standby Power	$\leq 0.5W$



Ordering 12 NC	9290 034 26906
Brand Name	Philips
Description	LED Transformer 24W 12V 2A 12VDC
Model Number	C024C200V012FNP3AI
Input Voltage	220 - 240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Approved

Installation & Application Notes :

Section I - Physical Characteristics

- 1.1 LED Driver shall be installed inside / outside an electrical enclosure for indoor application.
- 1.2 Wiring inside electrical enclosure shall comply with 600V/105°C rating or higher

Section II - Performance

- 2.1 LED Driver has a rated lifetime of 30,000 hours @ $T_c \leq 80^\circ\text{C}$
- 2.2 LED Driver tolerates sustained open circuit and short circuit output conditions without damage
- 2.3 LED Driver maximum allowable case temperature is 80°C - see product label for measurement location
- 2.4 LED Driver complies with the requirements of IS 15885 (Part 2 / Sec 13)

ELECTRICAL RATINGS :

Model	Input, 50/60 Hz		Output (nominal)		
	V	A	V DC	A DC	Watts
LED Transformer 24W 12V 2A GEN2	220 - 240	0.144	12	2.0	24

TECHNICAL CONSIDERATIONS (NOT FOR FIELD REPRESENTATIVES USE) :

Section III - Conditions of acceptability

When installed in the end-use equipment, the following are among the considerations to be made :

- 3.1 The equipment shall be installed in compliance with the enclosure, mounting, spacing, casualty and segregation requirements of the ultimate application.
- 3.2 The driver is suitable for indoor LED Lighting application.
- 3.3 The driver is suitable for use in indoor Dry locations.
- 3.4 When the drivers are installed in the end-use application, the case temperature should not exceed the temperature limits specified in the following table:

Model	Input Voltage, Hz	Max Case @ TC , °C
LED Transformer 24W 12V 2A GEN2	220 - 240 , 50/60	80



©2021 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.

Address: Signify Innovations India Ltd

9B, DLF 9th Floor

DLF Cyber City, DLF Phase III

Gurgaon 122002

India

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners. Date of release: Nov 21, 2022