


PHILIPS

Ordering 12NC	9290 014 72206
Brand Name	Xitanium
Description	Xitanium 220W 0.7A 240V OEM
Model Number	X220C070V315CNV1BO
Input Voltage	240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Certified

Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency at Max Load	Max Case Temp (°C)	Input Current (Arms)	Max Input Power (W)	Inrush Current (Apk/50%-µs)	THD @ Max Load (%)	Power Factor @Max Load	Surge Protection Com/Diff(KV)	Weight (Kg)	Envir. Protection Rating
220	210 -315	0.7	@ 240V	80	@ 240V	240	@ 240V	<10 @Max Load	> 0.95	4 / 4	1.1	Dry & Damp
			90%		1		38.3 / 625					

Wire Diagram

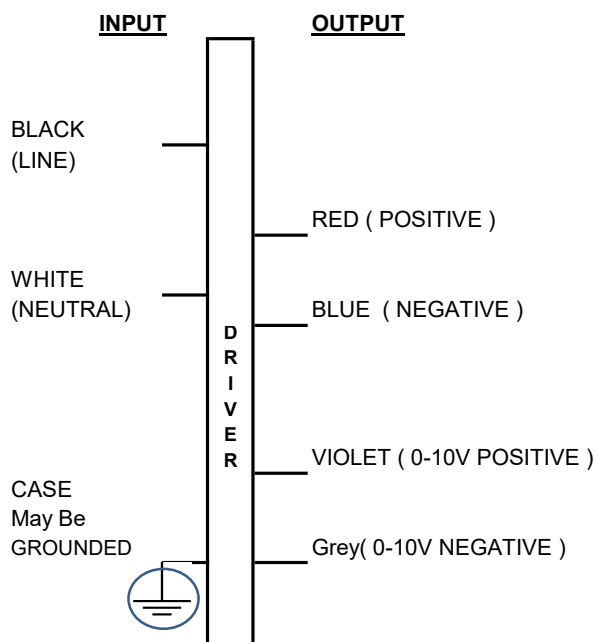

Input and output use lead-wires.
Lead-Wires are 18AWG 105C / 600V
Solid Copper

Lead Length
Standard lead length is 270mm (±30mm)
on I/P and O/P wires outside the can. Dimming wire length is TBD

Enclosure



	(mm)
Case Length	180
Case Width	80
Case Height	37.4
Mounting Length	195.2
Mounting Width	42.4
Overall Length	209.5

PHILIPS

Ordering 12NC	9290 014 72206
Brand Name	Xitanium
Description	Xitanium 220W 0.7A 240V OEM
Model Number	X220C070V315CNV1BO
Input Voltage	240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Certified

PHILIPS

LED Electronic Driver

Model No: X220C070V315CNV1BO

Dry & Damp
location

MAX 80°C
T_c

RoHS
COMPLIANT

XITANIUM™

220W 0.7A

0-10V DIMMING

U _{in}	240Vac
Freq	50Hz
I _{in}	1.05Aac
PF	0.95
U _{out}	210 - 315Vdc
I _{out}	0.7Adc
ta	-20...+55°C
U _{out} (max. open circuit)= 550Vdc	

Input Over Voltage Protection
Operating range: 120-277V

INPUT

BLACK (LINE)

WHITE (NEUTRAL)

CASE MUST BE GROUNDED

OUTPUT

RED (POSITIVE)

BLUE (NEGATIVE)

GRAY (0-10V -)

VIOLET (0-10V +)

DRIVER

MADE IN INDIA

Product Data	
Full product code	9290 014 72206
Full product name	Xitanium 220W 0.7A 240V OEM
Net weight per piece	1100 gms
Dimming	YES (0-10V)
Ambient Temp. Range	-20°C to +55°C
Corresponding T case	+5°C to +80°C
Line Voltage (AC operation)	120 - 277V
Line Voltage (CLO - Constant Light Output)	120 - 277V
Line Voltage (Performance)	240V +/-15%
Line Current	1.0A @ 240V
Line Frequency	50/60 Hz
Driver Type	Potted Driver
Envir. Protection Rating	Suitable for Dry and Damp location
Life at Tc 80 degree C	50000 hrs (nom.)
Suitable For Outdoor Use	Yes
Max. Tc	80°C
Inrush Current	278 Apk @ 240V
Max. Driver number on MCB 16A (Type B)	6 (max.)
Input Over Voltage	Can Survive input Voltage Stress of 320V for 48 hours
Input Over Voltage Cut Off	Auto Shutdown at ≥ 325V and Auto Recovery at 300 - 315V
Input Over Voltage Protection	Can Survive input Voltage Stress of 440V for 8 hours
Input Under Voltage Protection	Can Survive input Voltage Stress of 100V for 48 hours
Interfaces	0-10V Dimming
0-10V Dimming specification	150µA ± 3% source current from driver
LED Current Tolerance	+/- 7% of I _{max}
Earth Leakage Current	0.7 mA (max)
THD Total	≤ 10% @ Full Load @ 240V Supply
P.F. at Max. Load	≥ 0.95
Wire Isolation	All Wires are double isolated to Ground
Protection	Short Circuit and Open Circuit Protection for LED + and LED -
Standby Power (no Load condition)	≤12W



Ordering 12NC	9290 014 72206
Brand Name	Xitanium
Description	Xitanium 220W 0.7A 240V OEM
Model Number	X220C070V315CNV1BO
Input Voltage	240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Certified

Installation & Application Notes :

Section I - Physical Characteristics

- 1.1 LED Driver shall be installed inside an electrical enclosure
- 1.2 Wiring inside electrical enclosure shall comply with 600V/105°C rating or higher

Section II - Performance

- 2.1 LED Driver has a rated lifetime of 50,000 hours @ $T_c \leq 80^\circ\text{C}$
- 2.2 LED Driver tolerates sustained open circuit and short circuit output conditions without damage
- 2.3 LED Driver maximum allowable case temperature is 80°C - see product label for measurement location
- 2.4 LED Driver has Thermal Fold Back or shutdown above T_{cmax} , please refer to the table for typical performance
- 2.5 LED Driver reduces output power to LEDs if its case temperature $> 85^\circ\text{C}$
- 2.6 LED Driver complies with the requirements of IS 15885 (Part 2 / Sec 13)

ELECTRICAL RATINGS :

Model	Input, 50/60 Hz		Output (nominal)		
	V	A	V DC	mA DC Max	Watts
Xitanium 220W 0.7A 240V OEM	240	1	214 - 315	700	220

TECHNICAL CONSIDERATIONS (NOT FOR FIELD REPRESENTATIVES USE) :

Section III - Conditions of acceptability

When installed in the end-use equipment, the following are among the considerations to be made :

- 3.1 The equipment shall be installed in compliance with the enclosure, mounting, spacing, casualty and segregation requirements of the ultimate application.
- 3.2 The driver case must be grounded in the end-use application.
- 3.3 The driver is suitable for use in "Damp" and "Dry" locations.
- 3.4 When the drivers are installed in the end-use application, the case temperature should not exceed the temperature limits specified in the following table:


Model	Input Voltage, Hz	Max Case @ T_C , $^\circ\text{C}$
Xitanium 220W 0.7A 240V OEM	240 , 50/60	80

- 3.5 The leakage current test should be repeated in the end device.


Model	Input Voltage, Hz	Leakage Current
Xitanium 220W 0.7A 240V OEM	240 , 50/60	0.7mA max.



Ordering 12NC	9290 014 72206
Brand Name	Xitanium
Description	Xitanium 220W 0.7A 240V OEM
Model Number	X220C070V315CNV1BO
Input Voltage	240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Certified

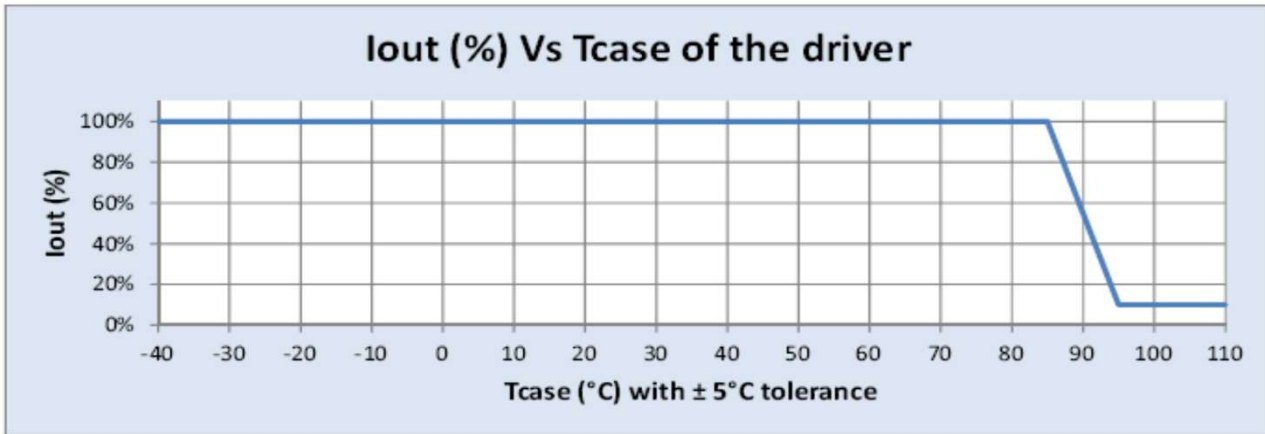


Inrush Current info :

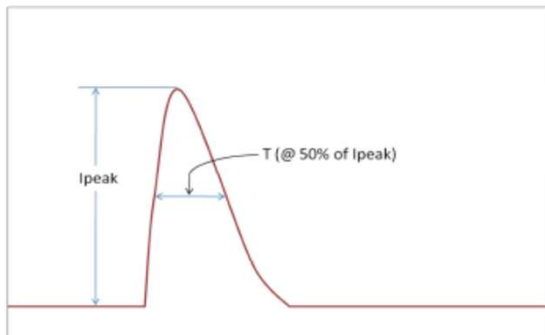

Vin	Ipeak	T (@50% of Ipeak)
240 Vrms	38.3A	625 μs

Lifetime vs Tcase of Driver :

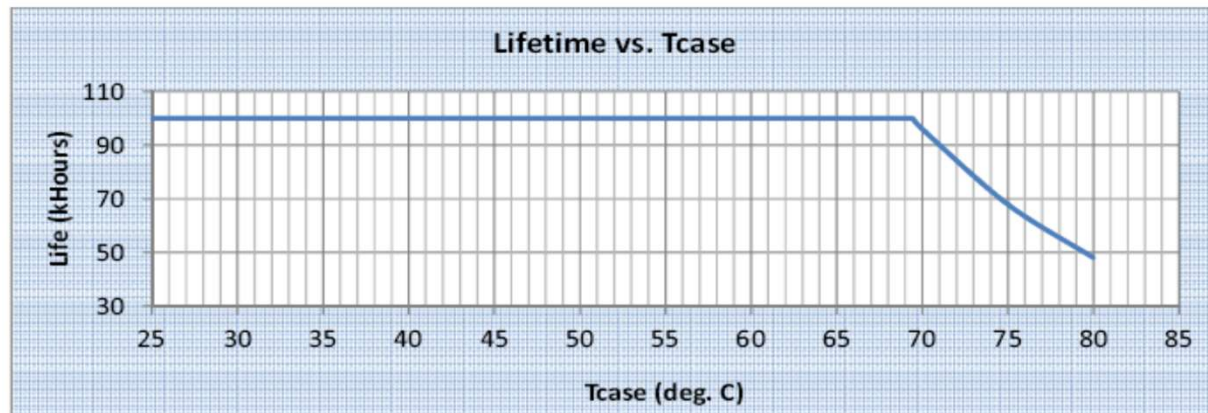

Failure rate info based upon field called rate data:
 $< 0.2\%$ per 1 Khr @ $\leq T_{case} 80^\circ\text{C}$



Ordering 12NC	9290 014 72206
Brand Name	Xitanium
Description	Xitanium 220W 0.7A 240V OEM
Model Number	X220C070V315CNV1BO
Input Voltage	240V
Input Frequency	50 / 60 Hz
RoHS	Yes
Approbations	IS 15885 (Part 2 / Sec 13)
Status	BIS Certified


Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

0-10V Dimming Curve

Dimming source current from the driver: 150µA (@ 0<Vdim<8V)

Minimum dim level: 10% of Iout

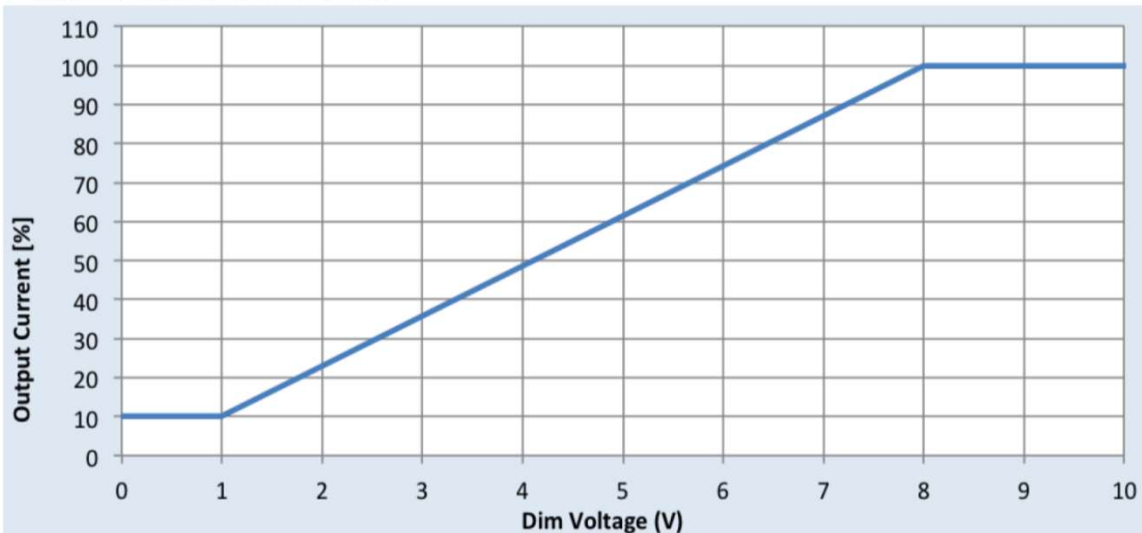

Isolation :

Isolation	Input Wires	Output Wires	Chassis
Input Wires	NA	1750 V	3750 V
Output Wires	1750 V	NA	3750 V
Chassis	3750 V	3750 V	NA



© 2021 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.

Address: Signify Innovations India Ltd
9B, DLF 9th Floor
DLF Cyber City, DLF Phase III
Gurgaon 122002
India

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners. Date of release: May 15, 2022