

**PHILIPS**

Sensors

EasyAir

Legrand EnOcean  
module



## Switch Commissioning Procedure

# Switch Commissioning Procedure

for Legrand EnOcean module

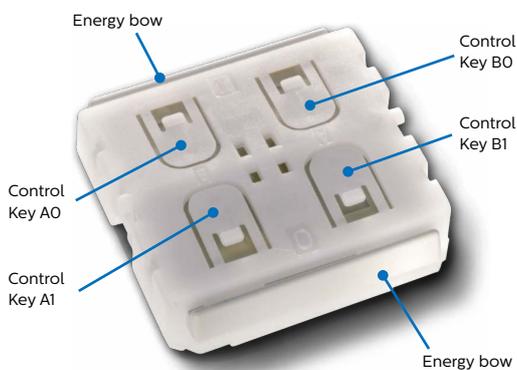


Figure 1 - Outer appearance of Legrand EnOcean module

This switch contains an EnOcean module internally as shown in the figure below. For commissioning this switch into a group, the cover needs to be removed.

To add such a switch to a group, ensure that the group is open. Opening of a ZigBee group is possible using EasyAir IR app with either “**Create group**” or “**Add to Group**” options. Once the group is open, follow the steps given below for commissioning the switch:

1. Remove the switch cover.
2. Press and hold the button A1 + the energy bow (as indicated on the module) for 10 seconds;
3. Now, perform a series of short presses of (1 second or less) each with buttons A0 + A1 + the energy bow until the luminaires blink. This should be done up to a maximum of 20 times and in one of the 20 presses, the channel will coincide with the luminaires and a feedback will be received.
4. After getting the luminaire feedback, complete the commissioning procedure by making a short press with button A0 + energy bow.
5. Place back the switch cover.
6. Close the group using EasyAir IR app with “Close group” option. Now the switch is successfully commissioned and added to the group.

**Note:** The above procedure also holds for ZigBee channel change. If you change the channel using the IR app, then you have to again perform the switch commissioning procedure.

### Reset procedure

1. Open the switch cover.
2. Press all 4 buttons A0, A1, B1, B2 together + energy bow for 10s. This will reset switch and bring it back on its default channel.

**Note:** Emergency action when switch does not respond to any network mode anymore.



© 2019 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

[www.lighting.philips.co.uk/oem-emea/products/connected-lighting](http://www.lighting.philips.co.uk/oem-emea/products/connected-lighting)

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

01/2019  
Data subject to change